


NUMBER OF 8 AWG PRIMARIES: 4
 CONDUCTOR: 8 AWG (133/29) TINNED PLATED COPPER
 PRIMARY INSULATION: .030" MIN. AVG. WALL ETFE
 PRIMARY O.D.: .221" (+ / - .004")
 COLOR CODE: BLACK, BLACK, BLACK, GREEN/YELLOW

NUMBER OF 18 AWG PRIMARIES: 2
 CONDUCTOR: 18 AWG (19/30) TINNED PLATED COPPER
 PRIMARY INSULATION: .010" MIN. AVG. WALL ETFE
 PRIMARY O.D.: .067" (+/- .002")
 COLOR CODE: BLUE, BLUE

FILLERS: FOAMED POLYPROPYLENE - NON WICKING
 AS REQUIRED FOR ROUNDNESS

SEPARATOR: NON-WOVEN POLYESTER TAPE

JACKET: .065" NOM. WALL POLYURETHANE (.045" MIN AVG WALL)
 JACKET COLOR: BLACK
 FINISHED DIAMETER: .670" (+ / - .015")
 CABLE RATINGS: 600V, 105°C (UL), 80°C (CSA)
 APPROVALS PER UL STYLE 20952 & CSA

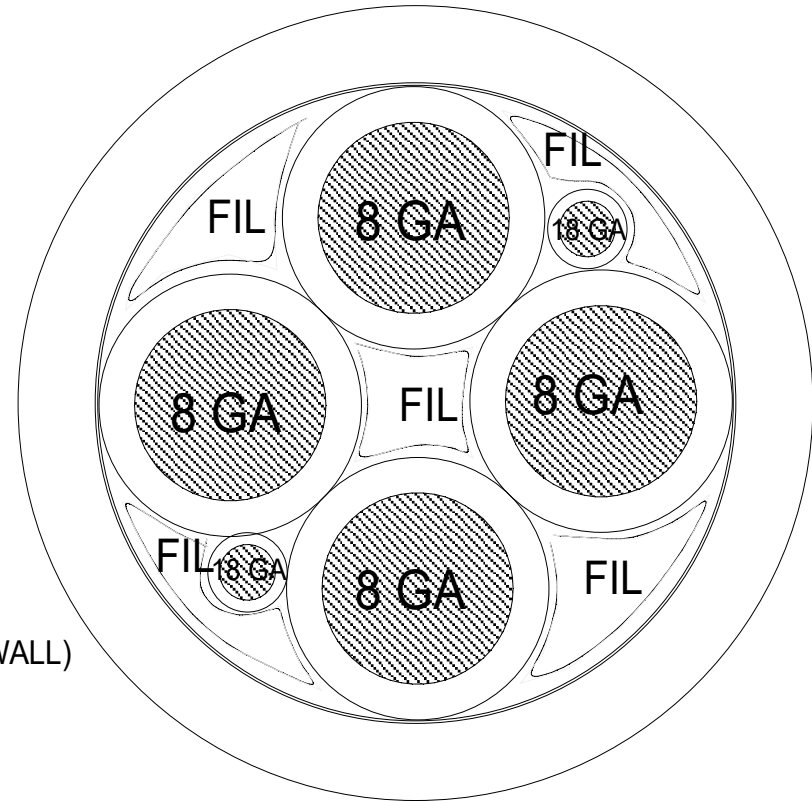

REVISIONS:	DATE:

P/N: 700405

DATE: 3/6/06

DRAWN: RD

**INDUSTRIAL ELECTRIC
 WIRE & CABLE, INC.**

31390 VIKING PARKWAY
 WEST LAKE, OHIO 44145-0282
 PH: 440-835-5601 FAX: 440-835-5971