

**Description:** Three 20 AWG Shielded Pairs  
 Overall Braid Shield, and TPE Jacket

**Date:** 4/20/2011

**JM Part Number:** JM56345

**Reference:** PLTC2008POBS-0JM

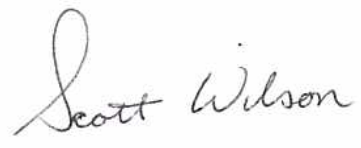
<b>Components</b>	Three 20 AWG Shielded Pairs
Conductor:	20 AWG, 19/32 tinned copper
Insulation:	.016" nominal wall of PVC (See Color Code)
Jacket:	.008" Clear Nylon
Pair:	Two conductors twisted together
Pair Drain Wire:	20 AWG, 19/32 tinned copper
Pair Foil Shield:	Aluminum-Mylar tape, Foil Free Edge, Aluminum side IN

<b>Cable Construction</b>	
Cabling:	Three Shielded Pairs cabled together
Binder:	Clear Mylar tape
Shield:	36 AWG tinned copper braid, 85% coverage
Separator:	Tissue tape
Jacket:	.050" nominal wall of Black Pressure Extruded TPE .454"

**Print**  
 E67179 3/PR 20 AWG SHIELDED (UL) TYPE PLTC-ER 90C 300V ...  
 LL41103 CSA AWM III A/B 90C 300V FT4

<b>Color Code</b>	Pair 1: Black White	Pair 2: Black Red	Pair 3: Black Green
-------------------	------------------------	----------------------	------------------------

<b>Requirements</b>	Temperature: 90°C Voltage: 300V	Approvals: UL Type PLTC-ER CSA AWM, FT4
---------------------	------------------------------------	--

*O.K. to substitute for Unico part - 922783* *5-May-2011*  


Written By:	rjc	4/20/2011	Rev. 0	Initial Issue
Revised By:	sca	5/6/2011	Rev. 1	Added JM and Reference Numbers
Revised By:				
Revised By:				