



DESC: 22/3 ITC/AWM 2517 105°C 300V

DWG NO: FITC223-01D

SCALE: 30x

DATE: 10/14/07

DR. BY: DPL

NWI P/N: FITC223-01D


NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

CUSTOMER: NWI DISTRIBUTION

CUSTOMER P/N:

ITEM	SPECS.
A.	22 GAUGE 7x.0096TC CONCENTRIC O.D. .029±.001"
B.	9 MILS SR-PVC INSULATION PER UL AWM 10002 8 MILS MIN. SEMI-RIGID PVC INSULATION O.D. .050±.002"
C.	TISSUE PAPER SEPARATOR
D.	35 MILS PRESSURED PVC JACKET 105°C 300V 30 MILS MIN. PVC JACKET BLACK JACKET UL AND CSA APPROVED UL ITC AND PLTC LISTED

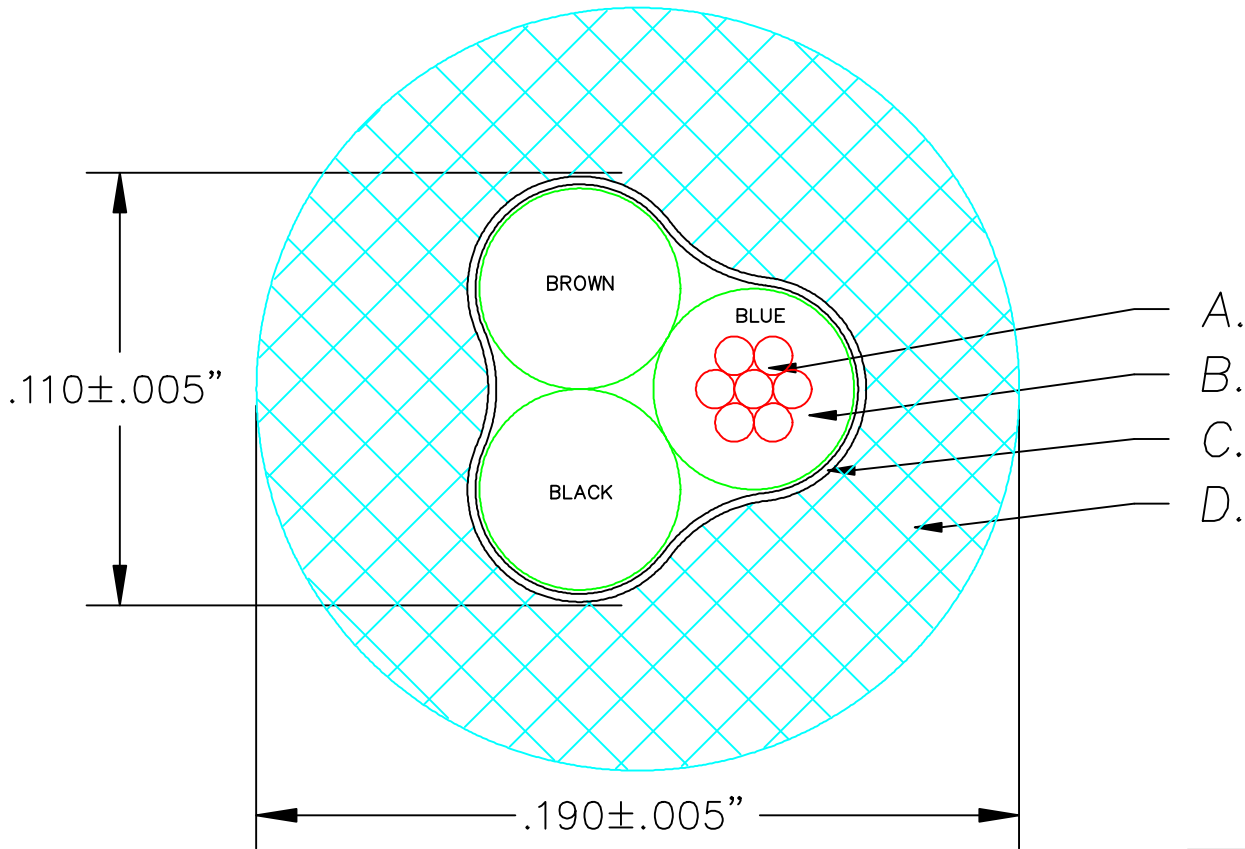

ELECTRICAL REQUIREMENTS:

DIELECTRIC WITHSTAND VOLTAGE: 1.5 KVAC

MECHANICAL REQUIREMENTS:

NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

ADDED PLTC REFERENCE	C	1/5/11	DPL		
CHANGED CONDUCTOR COLORS	B	11/16/07	DPL		
INITIAL RELEASE	A	10/14/07	DPL		
REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R