


CONDUCTOR

- 22 AWG 19/34 AWG TINNED COPPER INSULATED WITH .010" NOMINAL WALL OF PVC AND .005" NOMINAL WALL NYLON TO A NOMINAL O.D. OF .060"
- 2 PAIR TOTAL COLOR CODED AS FOLLOWS:
 - * P1: GREEN & YELLOW
 - * P2: BLACK & RED

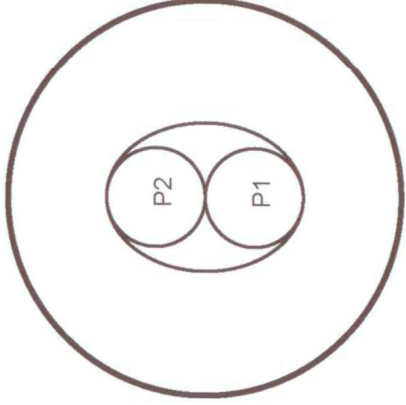

- NOTES:**
- .001" THICKNESS MYLAR BINDER BETWEEN CORE AND OVER JACKET
 - OVERALL .045" WALL BLACK PVC PRESSURED JACKET TO .335" NOMINAL FINAL DIAMETER +/- .005"
 - CABLE IDENTIFICATION(WHITE INK):
 - "C2Ag P/N 200069-000 (UL) ITC-ER DIRECT BURIAL 22AWG/4 105C E201454
 - SUNLIGHT RESISTANT OR PLTC-ER 105C OR CSA AWM I/II A/B LL91737 105C FT4 - SUNLIGHT RESISTANT"
 - CABLE IS RoHS COMPLIANT

DATA GUIDE

232 SHERMAN STREET
GARDNER, MA 01440
978-632-0900

CABLE CORP.

REV	DESCRIPTION	DATE	APP.
1	PRINT LEGEND AMENDMENT	2/18/11	
0	FIRST ISSUE	2/11/11	

TITLE

2PR 22 AWG ITC-ER,PLTC-ER CABLE DIRECT BURIAL

SCALE	P/N	REV
N/A	11B8-3	
DATE	DRN. BY	APP. BY
2/11	WJD	