



DESC: 22/6 ITC/AWM 2517 105°C 300V

DWG NO: FITC226-01D

ITEM SPECS.

SCALE: 20x

DATE: 10/15/07

DR. BY: DPL

NWI P/N: FITC226-01D


- A. 22 GAUGE 7x.0096TC CONCENTRIC
O.D. .029±.001"
- B. 9 MILS SR-PVC INSULATION PER UL AWM 10002
8 MILS MIN. SEMI-RIGID PVC INSULATION
O.D. .050±.002"
- C. POLY FILLER
- D. TISSUE PAPER SEPARATOR
- E. 35 MILS PRESSURED PVC JACKET 105%5DC 300V
30 MILS MIN. PVC JACKET BLACK JACKET
UL AND CSA APPROVED

CUSTOMER: NWI DISTRIBUTION

CUSTOMER P/N:

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

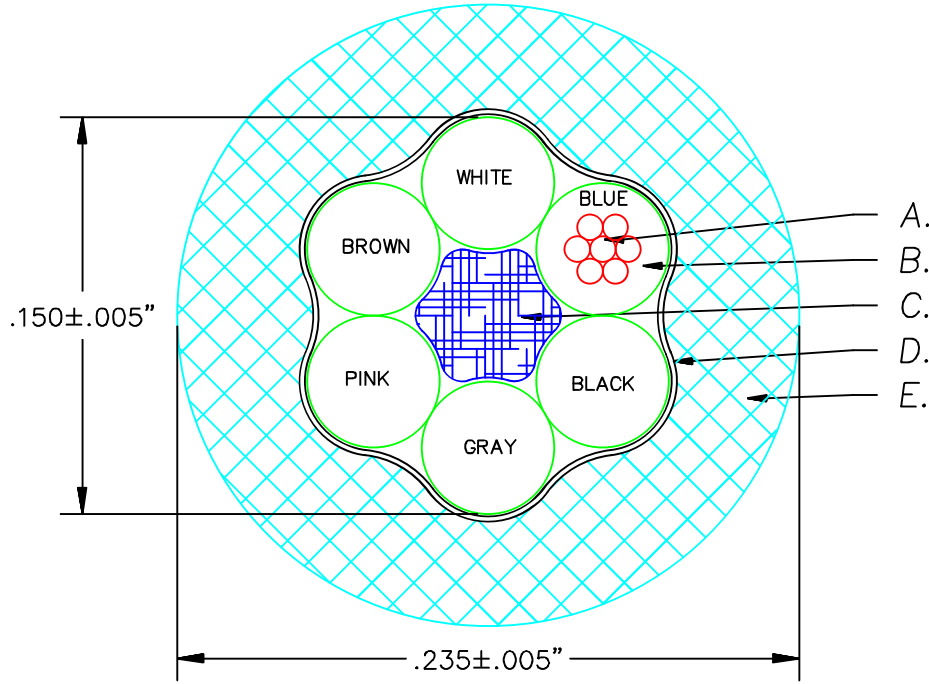

ELECTRICAL REQUIREMENTS:

DIELECTRIC WITHSTAND VOLTAGE: 1.5 KVAC

MECHANICAL REQUIREMENTS:

NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

CHANGED CONDUCTOR COLORS	B	11/16/07	DPL		
INITIAL RELEASE	A	10/15/07	DPL		
REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R