


Voltage Rating 1000V AC@60 Hz
 DC Resistance 36.4 Ohms/M ft @ 20°C
 Temperature Rating 200°C

Rev	ECN	Date	REVISIONS

CUSTOMER'S COPY

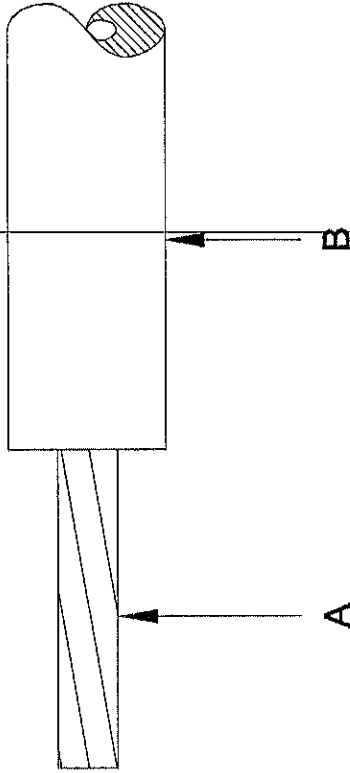

NOTE:

MATERIALS	DIAMETER	Nominal
A. Conductor 26(SC)AWG19x38 Silver plated Copper.	0.020" 0.040"	Nominal
B. Laminated PTFE		

GEOPHYSICAL SUPPLY COMPANY
 12021 BRITMORE PARK DRIVE
 HOUSTON, TEXAS 77041

PROPRIETARY DOCUMENT

Do not copy or reproduce without express written permission of Insulated Wire, Incorporated

Insulated Wire Incorporated
 2065 Smithtown Avenue Ronkonkoma, NY 11779

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS		DO NOT SCALE		INSULATED WIRE	REV
DRAWN ACGD	DATE	CHECKED	APPROVED		
2000	04/23/07	<i>gmp</i>	<i>MS</i>		26(SC)19x38LS10
					04/23/07