

- 1) CONSTRUCTION:

CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER	NOM. DIA. .038"
INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS	.064"
PAIR: COLOR CODED SINGLES TWISTED INTO A PAIR	.128"
JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .192"

- 2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	20.4 LBS.

- 3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	26 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	10.4 Ω/1000'

- 4) AGENCY APPROVALS:
 - (UL) NEC TYPE CM
 - CSA AWM FT4
 - UL STYLE 2464

- 5) APPLICATION:

INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.


- 6) PRINT:

QUABBIN 6130R (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
 - 1. BLACK
 - 2. RED

- 8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

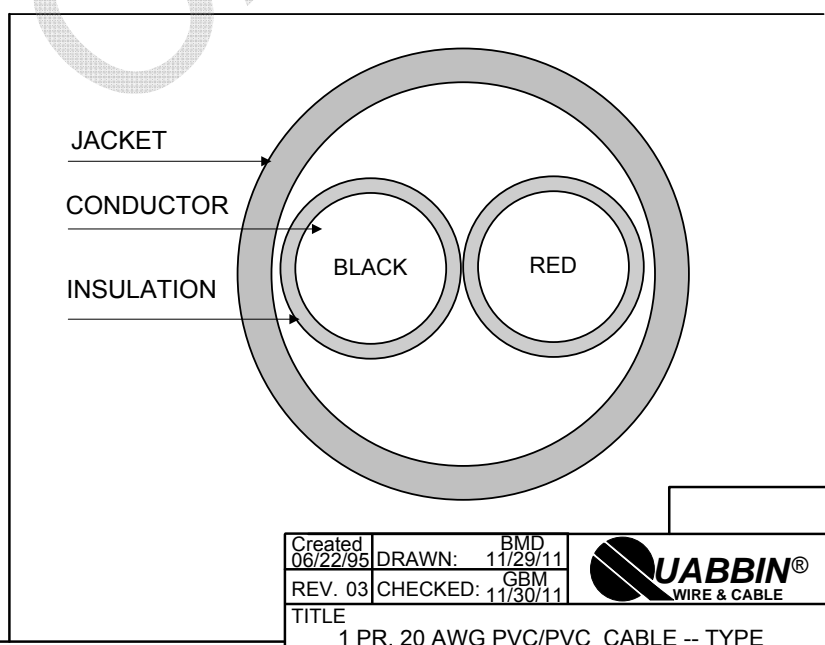

Created 06/22/95	DRAWN: 11/29/11	BMD	
REV. 03	CHECKED: 11/30/11	GBM	
TITLE			
1 PR. 20 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4			
QUABBIN P/N		6130	1 of 1

CUSTOMER APPROVAL: _____ DATE: _____