

1) CONSTRUCTION:
 CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER
 INSULATION: POLYETHYLENE, .016" NOM. WALL THICKNESS
 CABLE: COLOR CODED SINGLES TWISTED TOGETHER WITH AN ALUMINUM POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) AND A 20 AWG STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION.
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .028" NOM. WALL THICKNESS

NOM. DIA.
 .038"
 .070"
 .143"
 OVERALL CABLE DIAMETER .199"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 75°C
 WT./M', NOM., NET. 23.3 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 27 PF/FT
 CAPACITANCE, GROUNDED, NOM. 51 PF/FT
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. 10.4 Ω/1000'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA TYPE CMG
 UL STYLE 2092

5) APPLICATION:
 INSTRUMENTATION, SOUND, AND BROADCAST CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 6140R (UL) TYPE CM 20 AWG 75C SHIELDED OR AWM 2092 -- CSA LL51726 TYPE CMG 60C -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. CLEAR
 2. BLACK

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

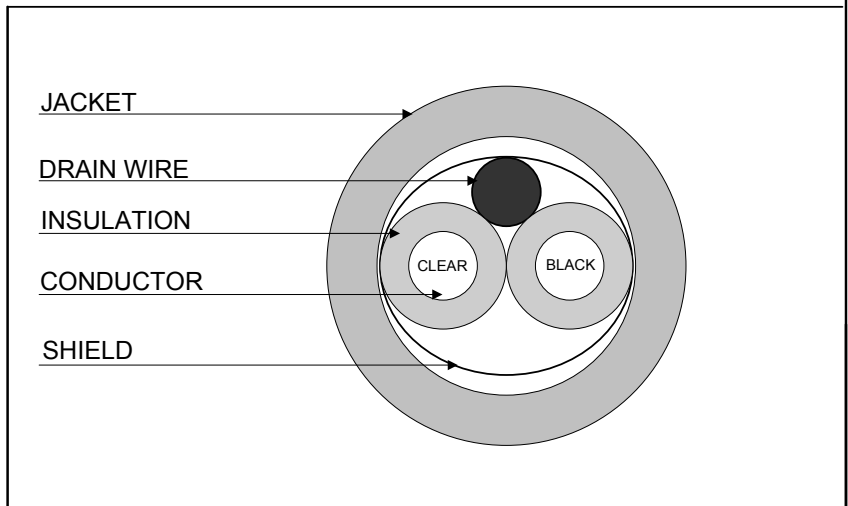

| | | | |
|-------------|----------------------------|--------------------------------|--|
| REVISION 07 | DATE: | DRAWN S. ADDIE 09/21/95 | |
| REVISED BY | <i>B. Duczyski</i> 10/6/10 | CHECKED J. RIVERNIDER 09/21/95 | |
| CHECKED | <i>G. Munn</i> 10/07/10 | CHECKED M. FERRERO 09/22/95 | |
| CHECKED | | CUSTOMER APPROVAL: DATE: | TITLE |
| | | | 2/C 20AWG PE/PVC CABLE --TYPE CM, STYLE 2092. CSA TYPE CMG |
| | | | QUABBIN P/N 6140 1 OF 1 |