

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	LEAD FREE POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050"
CABLE:	(12) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.202"
JACKET:	LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.266"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-30°C
WT./M', NOM., NET.	51.5 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	30 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	16.7 OHMS/M'


4) AGENCY APPROVALS:  
 (UL) NEC TYPE CM  
 CSA AWM FT4  
 UL STYLE 2464 80C 300V

5) APPLICATION:  
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT

6) PRINT:  
 QUABBIN 7160R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

- 7) COLOR CODE:
1. BLACK
  2. RED
  3. WHITE
  4. GREEN
  5. ORANGE
  6. BLUE
  7. BROWN
  8. YELLOW
  9. VIOLET
  10. GRAY
  11. PINK
  12. TAN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

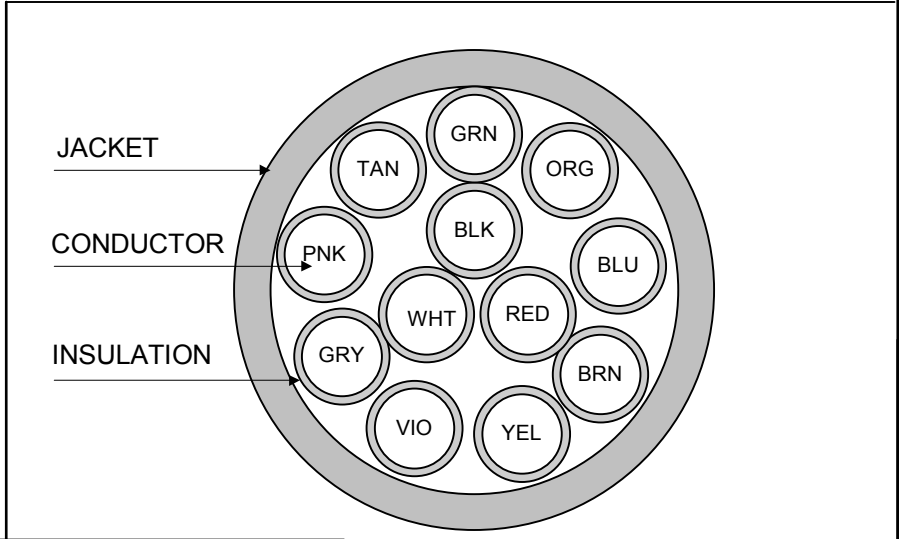

REVISION 03	DATE:	DRAWN S. ADDIE	12/04/95	
REVISED BY	B. M. DUCZYNSKI 2/23/05	CHECKED J. RIVERNIDER	12/04/95	
CHECKED	G. MELNIK 2/23/05	CHECKED M. FERRERO	12/04/95	
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE
				12/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4
				QUABBIN P/N 7160 1 OF 1