

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	.030"
INSULATION:	HIGH DENSITY POLYETHYLENE, .016" NOM. WALL THICKNESS	.062"
PAIRS:	(3) COLOR CODED SINGLES TWISTED TO FORM A CABLE CORE	.127"
SHIELD:	AN ALUMINUM POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) WITH A 22 AWG 7/30 STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION.	.130"
JACKET:	LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .025" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .180"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 75°C
WT./M', NOM., NET.	20.9 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	23 PF/FT.
CAPACITANCE, GROUNDED, NOM.	41 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 OHMS/M'


4) AGENCY APPROVALS:  
 UL AWM STYLE 2093  
 (UL) NEC TYPE CM  
 CSA TYPE CMG

5) APPLICATION:  
 INSTRUMENTATION, SOUND, AND BROADCAST CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 7325R (UL) TYPE CM 22 AWG 75C SHIELDED OR AWM 2093 -- CSA LL51726 TYPE CMG 60C -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. CLEAR  
 2. RED  
 3. BLACK

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

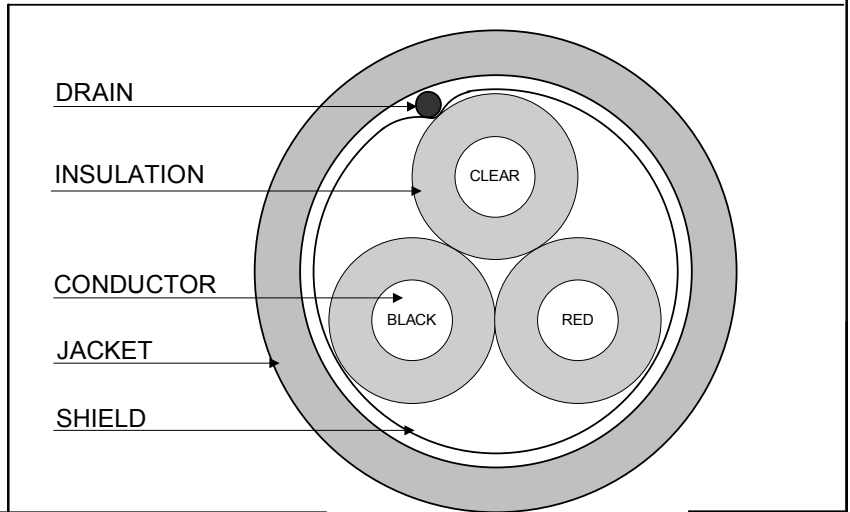

REVISION 03	DATE:	DRAWN S. ADDIE 03/06/96	
REVISED BY	B. M. DUCZYNSKI 7/28/05	CHECKED J. RIVERNIDER 03/06/96	
CHECKED	J. RIVERNIDER 7/28/05	CHECKED M. FERRERO 03/06/96	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 3/C 22 AWG PE/PVC CABLE -- TYPE CM, STYLE 2093, CSA TYPE CMG
			QUABBIN P/N 7325 1OF 1