

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"
 INSULATION: POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 CABLE: (12) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE .203"
 SHIELD: AN OVERALL ALUMINUM POLYESTER SHIELD SHALL BE APPLIED OVER THE CABLE CORE. A 22 AWG 7/30 TINNED COPPER DRAIN WIRE SHALL BE INCLUDED WITH THE SHIELD .206"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .270"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80° C
 WT./M', NOM., NET. 54.7 LBS.


3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 37 PF/FT.
 CAPACITANCE, GROUNDED, NOM. 68.5 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/M'

4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464

5) APPLICATION:
 COMMUNICATION, DATA, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7560R (UL) TYPE CM 22 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

- 7) COLOR CODE:
1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE
 6. BLUE
 7. BROWN
 8. YELLOW
 9. VIOLET
 10. GRAY
 11. PINK
 12. TAN

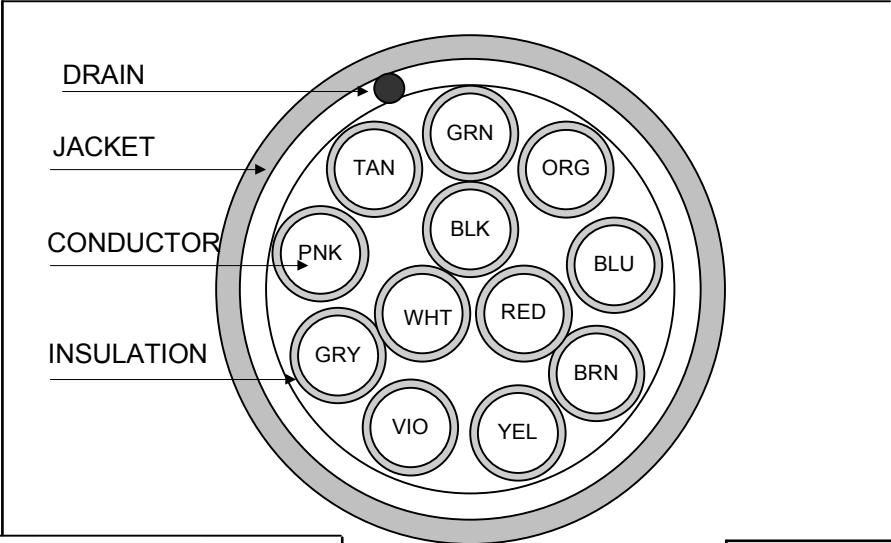

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

REVISION 02	DATE:	DRAWN <i>B. Duczynski</i> 11/16/06	
REVISED BY		CHECKED <i>J. Kuemler</i> 11/27/06	
CHECKED		CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 12/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 7560 1 OF 1