

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050"
CABLE:	(15) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.235"
SHIELD:	AN OVERALL ALUMINUM POLYESTER SHIELD (FOIL OUT, 100% COVERAGE)		
	SHALL BE APPLIED OVER THE CABLE CORE AND SHALL INCLUDE A 22 AWG 7/30 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE		.238"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS		
	OVERALL CABLE DIAMETER		.302"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	65.8 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL NOM.	36 PF/FT.
CAPACITANCE, GROUNDED NOM.	67 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	16.7 Ω/1000'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 (UL) AWM STYLE 2464

5) APPLICATION:
 COMMUNICATIONS, DATA, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7565R (UL) TYPE CM 22 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE
 6. BLUE
 7. BROWN
 8. YELLOW
 9. VIOLET
 10. GRAY
 11. PINK
 12. TAN
 13. RED/GREEN
 14. RED/YELLOW
 15. RED/BLACK

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

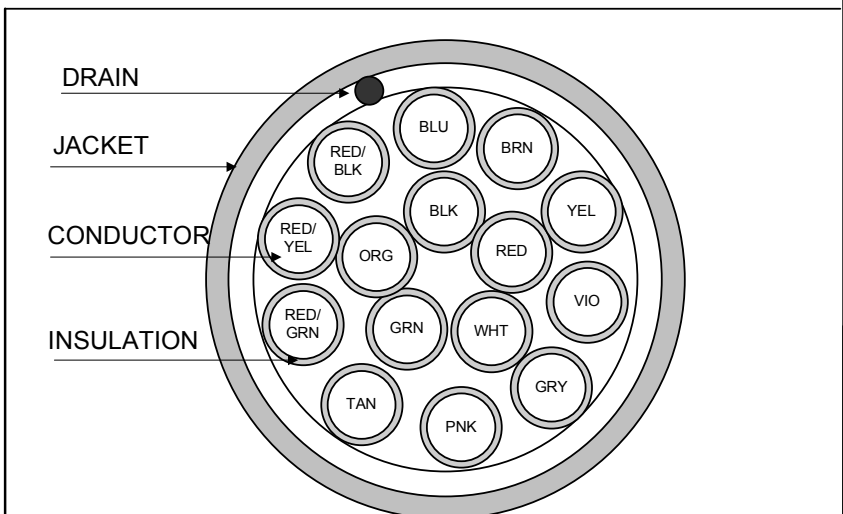

REVISION 03	DATE:	DRAWN	S. ADDIE	09/08/95	<p>QUABBIN® WIRE & CABLE</p>	
REVISED BY	<i>B. Duczynski</i> 4/13/07	CHECKED	J. RIVERNIDER	09/08/95		
CHECKED	<i>J. Rivernider</i> 4/17/07	CHECKED	M. FERRERO	09/08/95		
CHECKED		CUSTOMER APPROVAL:	DATE:			
					TITLE 15/C 22 AWG PVC/PVC CABLE --TYPE CM. STYLE 2464. CSA AWM FT4	
				QUABBIN P/N	7565	1 OF 1