

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	24 AWG 7/32 STRANDED TINNED COPPER	.024"
INSULATION:	POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.044"
CABLE:	(3) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE	.094"
SHIELD:	ALUMINIZED POLYESTER FOIL SHIELD, 100% COVERAGE WITH A 24 AWG STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION.	.097"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .162"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	16.3 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	33 PF/FT.
CAPACITANCE, GROUNDED	65 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	26.2 OHMS/M'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 (UL) AWM STYLE 2464
 CSA AWM FT4

5) APPLICATION:
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 8165R (UL) TYPE CM 24 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. BLACK
 2. WHITE
 3. RED

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

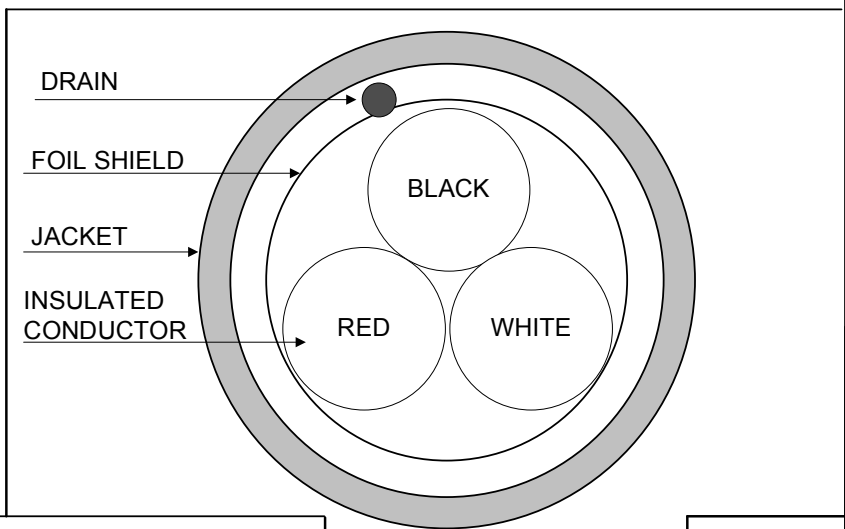

REVISION 04	DATE:	DRAWN S. ADDIE 09/30/96	
REVISED BY	<i>B. Duceyuski</i> 8/28/06	CHECKED J. RIVERNIDER 09/30/96	
CHECKED	<i>J. Rivernider</i> 8/28/06	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE
			3/C 24 AWG PVC/PVC SHIELDED CABLE - TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 8165
			1 OF 1