

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	26 AWG 7/34 STRANDED TINNED COPPER	.019"
INSULATION:	POLYVINYLCHLORIDE, .007" NOM. WALL THICKNESS	.033"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS	.066"
CABLE:	(2) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE	.095"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .017" NOM. WALL THICKNESS	
	OVERALL CABLE DIAMETER	.133"
	(NOM. O.D. ACROSS WIDEST CROSS SECTION)	.166"

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	60°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	8.6 LBS.

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL, NOM.	19 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	40.0 Ω/1,000'
IMPEDANCE, CHARACTERISTIC, NOM.	100 Ω


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM

5) APPLICATION:
 CATEGORY 3 JUMPER CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN DATAMAX P/N 9304 -- (UL) TYPE CM 26 AWG -- PATCH CORD/JUMPER CAT 3 -- RoHS --
(LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)

- 7) COLOR CODE:
 1. WHITE/BLUE X BLUE
 2. WHITE/ORANGE X ORANGE

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

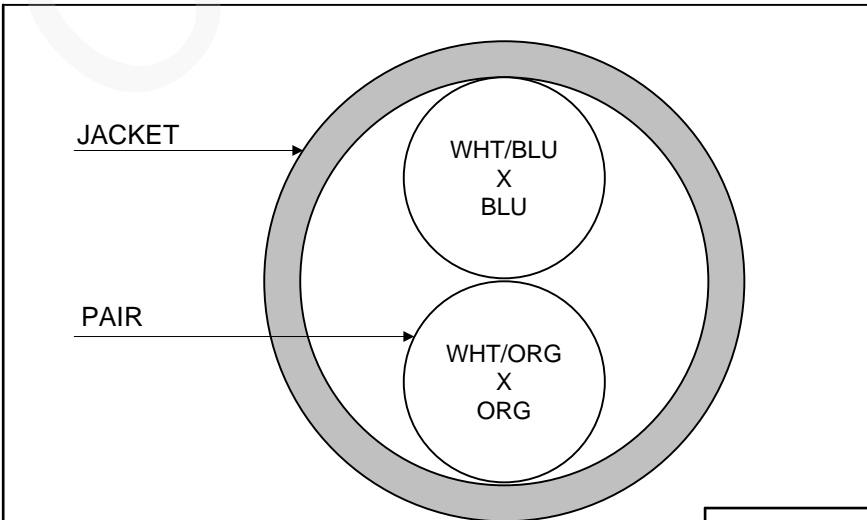

Created 11/09/94	DRAWN: BMD 09/10/15
REV. 06	CHECKED: GBM 09/10/15



TITLE	PATCH CABLE FOR CAT 3	
QUABBIN P/N	9304	1 of 1

CUSTOMER APPROVAL:

DATE: