

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	26 AWG 7/34 STRANDED TINNED COPPER	.019"
INSULATION:	POLYVINYLCHLORIDE, .007" NOM. WALL THICKNESS	.033"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS	.066"
CABLE:	(4) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE	.139"
JACKET:	POLYVINYLCHLORIDE, CHROME, .019" NOM. WALL THICKNESS	
	OVERALL CABLE DIAMETER	.165"

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	60°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	15.7 LBS.

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL, NOM.	19 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	42.6 Ω/1000'
IMPEDANCE, CHARACTERISTIC, NOM.	100 Ω


4) AGENCY APPROVALS:
(UL) TYPE CM

5) APPLICATION:
PATCH CORD/JUMPER TO SUPPORT 10 BASE T AND CATEGORY 3 APPLICATIONS
RoHS COMPLIANT MATERIALS.

6) PRINT:
QUABBIN DATAMAX P/N 9308 -- (UL) TYPE CM 26 AWG -- PATCH CORD/JUMPER CAT 3 -- RoHS --
(LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)

- 7) COLOR CODE: (LONGITUDINAL STRIPE)
1. WHITE/BLUE X BLUE
 2. WHITE/ORANGE X ORANGE
 3. WHITE/GREEN X GREEN
 4. WHITE/BROWN X BROWN

8) PACKAGING:
TO BE PACKAGED AS PER QWC'S
STANDARD PACKAGING.

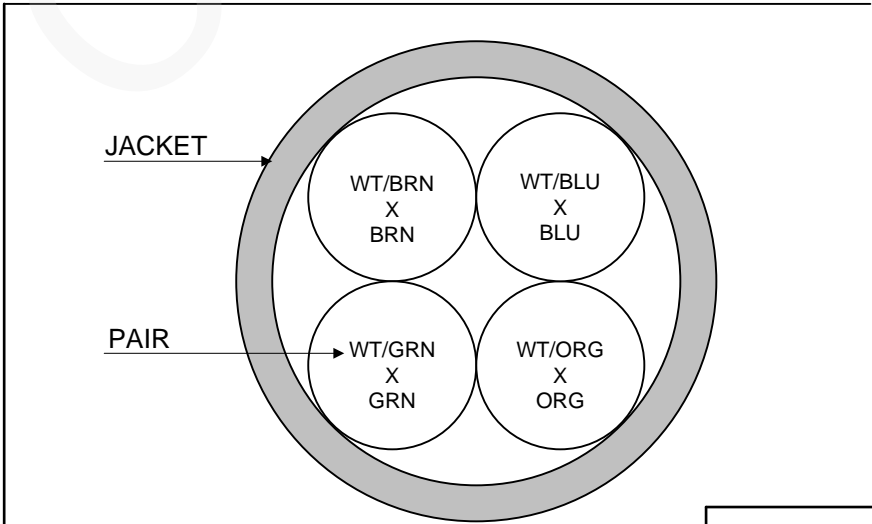

Created 12/02/94	DRAWN: BMD 08/27/15	
REV. 07	CHECKED: GBM 08/27/15	
TITLE PATCH CABLE FOR CAT 3		
QUABBIN P/N	9308	1 of 1

CUSTOMER APPROVAL: _____ DATE: _____