

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 14 AWG 19/.0147 STRANDED TINNED COPPER .072"
 INSULATION: LEAD FREE POLYVINYLCHLORIDE, .031" NOM. WALL THICKNESS .134"
 CABLE: (2) COLOR CODED SINGLES TWISTED TO FORM A CABLE CORE .268"
 JACKET: LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .332"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 80°C & 105°C
 WT./M', NOM., NET. 59.4 LBS.
 BEND RADIUS, MIN. (ICEA 6-61-402) 4" (12X O.D.)

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 20 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 600V
 D.C. RESISTANCE, MAX. PER ASTM B286 2.62 OHMS/M'


4) AGENCY APPROVALS:
 CSA AWM FT4
 NEC (UL) TYPE CL3
 UL AWM STYLE 2463


5) APPLICATION:
 INSTRUMENTATION, SOUND, AND BROADCAST CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 2115R (UL) TYPE CL3 14 AWG 105C OR AWM 2463 -- CSA LL51726 AWM I/II A/B 105C 600V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. BLACK
 2. WHITE

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

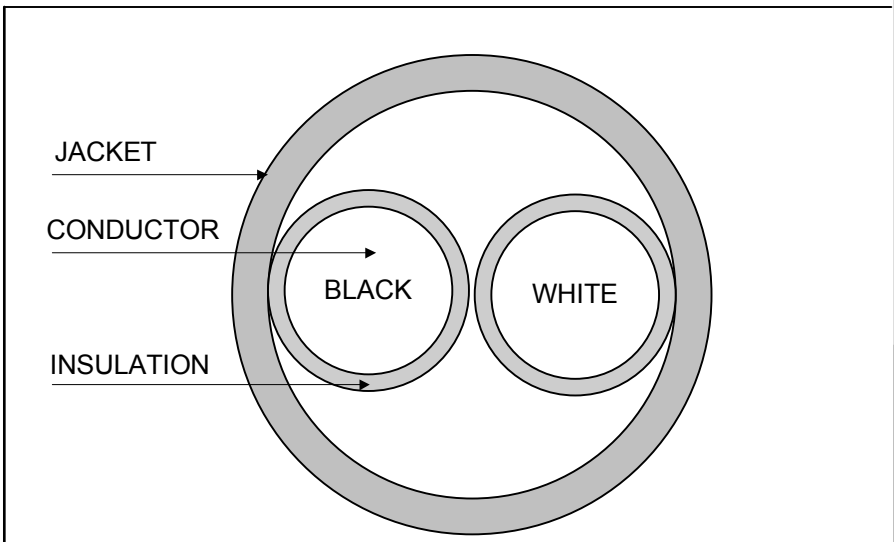

REVISION 04	DATE:	DRAWN J. RIVERNIDER 11/04/94	
REVISED BY	B. DUCZYNSKI 6/23/05	CHECKED G. MELNIK 11/04/94	
CHECKED	J. RIVERNIDER 6/24/05	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE
			2/C 14 AWG PVC/PVC CABLE -- TYPE CL3, AWM 2463, CSA AWM FT4
			QUABBIN P/N 2115 1 OF 1