


- 1) CONSTRUCTION:
- |             |   |                        |       |
|-------------|---|------------------------|-------|
| CONDUCTOR:  | 22 AWG 7/30 STRANDED TINNED COPPER                                  | NOM. DIA.              | .030" |
| INSULATION: | SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS             |                        | .050" |
| CABLE:      | (2) COLOR CODED SINGLES TWISTED TO FORM A CABLE CORE.               |                        | .100" |
| JACKET:     | LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .017" NOM. WALL THICKNESS | OVERALL CABLE DIAMETER | .134" |
- 2) PHYSICAL PROPERTIES:
- |                          |           |
|--------------------------|-----------|
| TEMPERATURE RATING, MAX. | 90°C      |
| WT./M', NOM., NET.       | 10.1 LBS. |
- 3) ELECTRICAL CHARACTERISTICS:
- |                                     |           |
|-------------------------------------|-----------|
| CAPACITANCE, MUTUAL                 | 19 PF/FT. |
| DIELECTRIC WITHSTANDING, MIN        | 900V RMS  |
| MANUFACTURER'S VOLTAGE RATING, MAX. | 250V      |
| D.C. RESISTANCE, MAX. PER ASTM B286 | 16.7 OHMS |
- 4) AGENCY APPROVALS:  
UL NEC TYPE CL2
- 5) APPLICATION:  
SECURITY AND ALARM INTERCONNECT. POWER LIMITED CIRCUIT CABLE - CLASS 2 CIRCUITS.  
RoHS COMPLIANT MATERIALS.
- 6) PRINT:  
QUABBIN 6500R (UL) TYPE CL2 22 AWG 90C -- RoHS -- **(LOT DESIGNATOR)**
- 7) COLOR CODE:  
1. BLACK  
2. RED
- 8) PACKAGING:  
TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

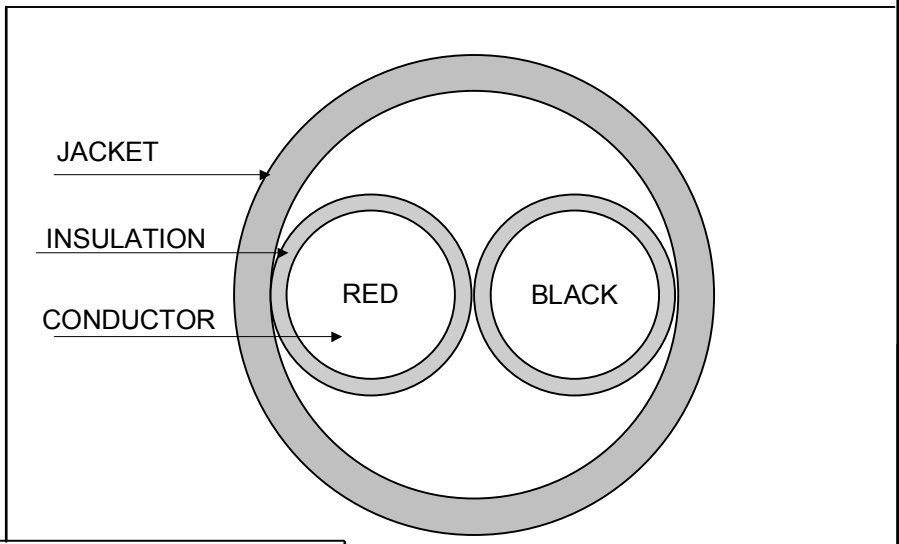

REVISION 04	DATE:	DRAWN J. RIVERNIDER 04/26/95	
REVISED BY	B. M. DUCZYNSKI 6/23/05	CHECKED J. RIVERNIDER 04/26/95	
CHECKED	J. RIVERNIDER 6/23/05	CHECKED M. FERRERO 04/26/95	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE
			2/C 22 AWG PVC/PVC CABLE -- TYPE CL2
			QUABBIN P/N 6500
			1 OF 1