

1) CONSTRUCTION:
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS
 CABLE: (2) COLOR CODED SINGLES TWISTED TOGETHER WITH A LEFT HAND LAY.
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS
 NOM. DIA. .030"
 .050"
 .100"
 OVERALL CABLE DIAMETER .164" ±.005"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 TEMPERATURE RATING, MIN. -40°C (PER UL 13, COLD BEND)
 WT./M', NOM., NET. 14.2 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 26 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1000'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 UL AWM STYLE 2464
 CSA AWM FT4


5) APPLICATION:
 RS-232 COMPUTER INTERCONNECT, CONTROL, AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7115R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. RED

8) PACKAGING
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

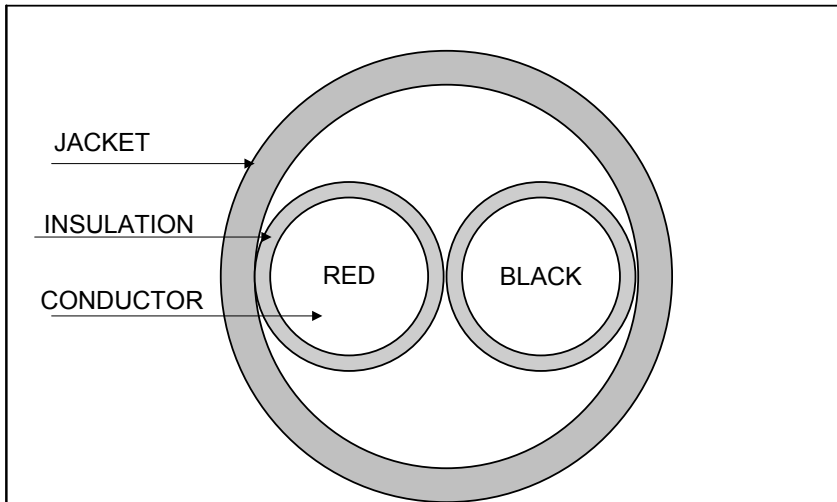

REVISION 06	DATE:	DRAWN J. RIVERNIDER 02/10/95	
REVISED BY	<i>B. Ducezyuski</i> 1/28/09	CHECKED G. MELNIK 02/10/95	
CHECKED	<i>G. Munro</i> 01/29/09	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 2/C 22 AWG PVC/PVC CABLE -- TYPE CM, AWM 2464, CSA AWM FT4
			QUABBIN P/N 7115 1 OF 1