

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"
 INSULATION: LEAD FREE SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 CABLE: (5) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE .135"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS .199"
OVERALL CABLE DIAMETER

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 25.2LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 28 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 OHMS/M'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464 80C 300V

5) APPLICATION:
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7130R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

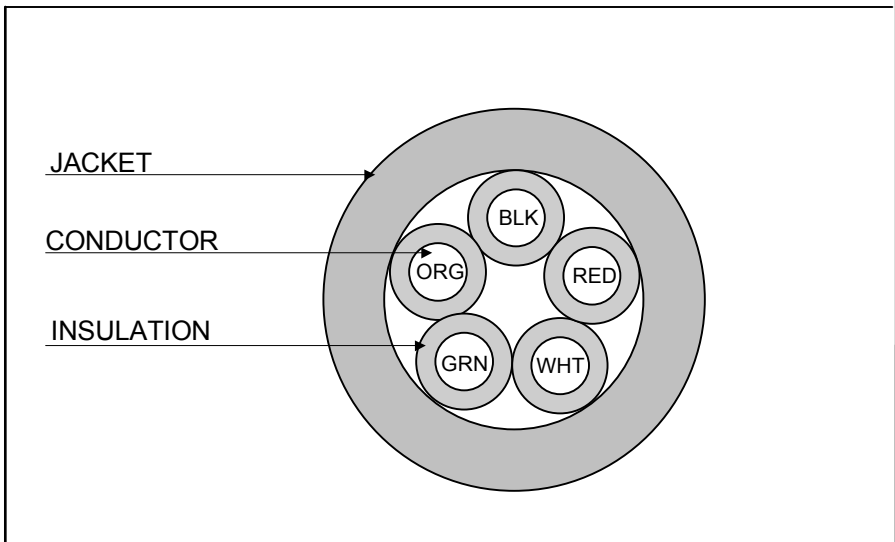

| | | | | |
|-------------|-------------------------|-----------------------|----------|---|
| REVISION 03 | DATE: | DRAWN S. ADDIE | 03/26/97 | |
| REVISED BY | B. M. DUCZYNSKI 4/20/05 | CHECKED J. RIVERNIDER | 03/26/97 | |
| CHECKED | J. RIVERNIDER 4/21/05 | CHECKED | | |
| CHECKED | | CUSTOMER APPROVAL: | DATE: | TITLE |
| | | | | 5/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4 |
| | | | | QUABBIN P/N 7130 1 OF 1 |