

1) CONSTRUCTION:
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER NOM. DIA. .030"
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 CABLE: (6) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE .145"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .209"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 29.5LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 18 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. 16.4 OHMS/M'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464


5) APPLICATION:
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7135R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE
 6. BLUE

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

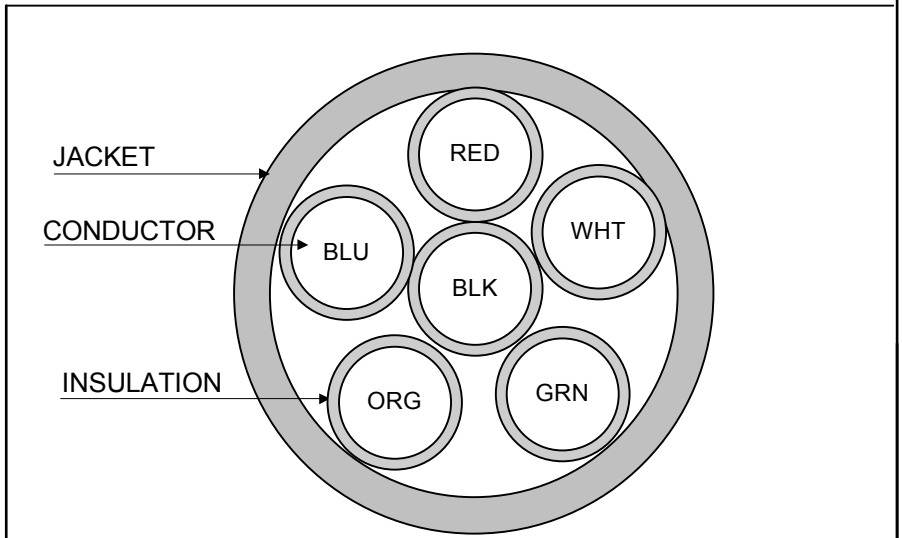

REVISION 03	DATE:	DRAWN S. ADDIE	09/13/95	
REVISED BY	<i>B. Duczynski</i> 8/7/06	CHECKED J. RIVERNIDER	09/13/95	
CHECKED	<i>J. Ruemler</i> 8/07/06	CHECKED M. FERRERO	09/13/95	
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE
				6/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4
				QUABBIN P/N 7135
				1 OF 1