

1) CONSTRUCTION: NOM. DIA.  
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"  
 INSULATION: LEAD FREE SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"  
 CABLE: (25) INSULATED CONDUCTORS TWISTED TOGETHER WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE .310"  
 JACKET: LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .374"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 WT./M', NOM., NET. 96.3 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL 28 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 OHMS/M'


4) AGENCY APPROVALS:  
 (UL) NEC TYPE CM  
 CSA AWM FT4  
 UL STYLE 2464 80C 300V

5) APPLICATION:  
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 7175R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

- 7) COLOR CODE:
- 1. BLACK
  - 2. RED
  - 3. WHITE
  - 4. GREEN
  - 5. ORANGE
  - 6. BLUE
  - 7. BROWN
  - 8. YELLOW
  - 9. VIOLET
  - 10. GRAY
  - 11. PINK
  - 12. TAN
  - 13. RED/GREEN
  - 14. RED/YELLOW
  - 15. RED/BLACK
  - 16. WHITE/BLACK
  - 17. WHITE/RED
  - 18. WHITE/GREEN
  - 19. WHITE/YELLOW
  - 20. WHITE/BLUE
  - 21. WHITE/BROWN
  - 22. WHITE/ORANGE
  - 23. WHITE/GRAY
  - 24. WHITE/VIOLET
  - 25. WHITE/BLACK/RED

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

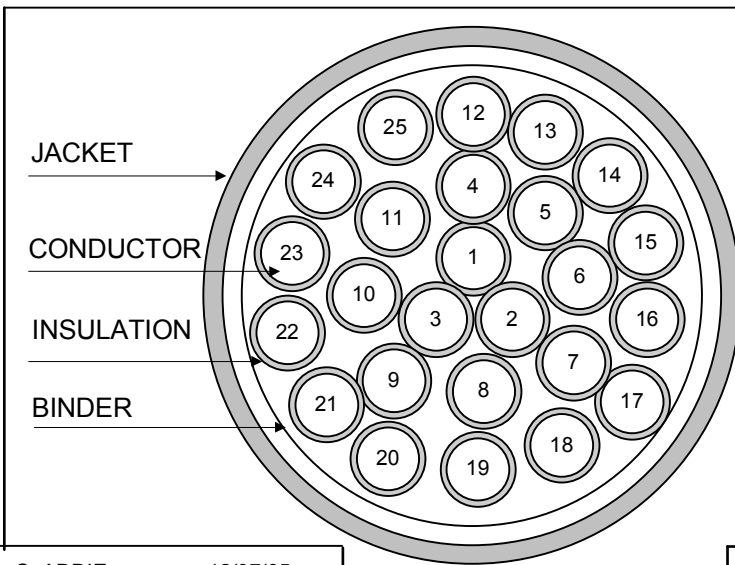

REVISION 03	DATE:	DRAWN S. ADDIE	12/07/95	
REVISED BY	B. M. DUCZYNSKI 3/28/05	CHECKED J. RIVERNIDER	12/07/95	
CHECKED	J. RIVERNIDER 3/25/05	CHECKED M. FERRERO	12/07/95	
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE
				25/C 22 AWG PVC/PVC CABLE --TYPE CM. STYLE 2464. CSA AWM FT4
				QUABBIN P/N 7175 1OF 1