

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	.030"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.050"
CABLE:	(4) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE.	.121"
SHIELD:	ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) WITH A 22 AWG STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION.	.133"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	
	OVERALL CABLE DIAMETER	.197"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-40°C (PER UL 13, COLD BEND)
WT./M', NOM., NET.	24.2 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	41 PF/FT.
CAPACITANCE, GROUNDED, NOM.	76 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 Ω/1,000'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 (UL) AWM STYLE 2464
 CSA AWM FT4


5) APPLICATION:
 COMMUNICATION, DATA, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7525R (UL) TYPE CM 22 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. BLACK
 2. RED
 3. WHITE
 4. GREEN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

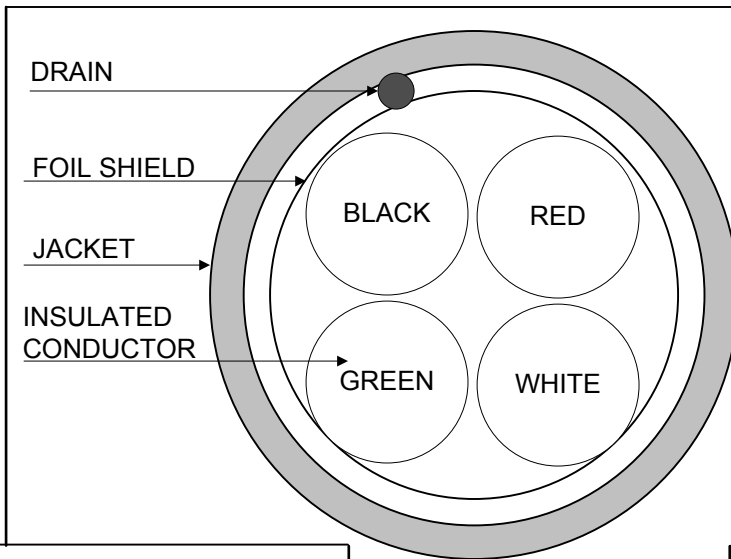

REVISION 04	DATE:	DRAWN J. RIVERNIDER 04 03 95	
REVISED BY	<i>B. Duczynski</i> 7/15/09	CHECKED G. MELNIK 04 03 95	
CHECKED	<i>G. Nunez</i> 07/16/09	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 4/C 22 AWG PVC/PVC SHIELDED CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 7525 1 OF 1