

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 CABLE: (10) INSULATED CONDUCTORS TWISTED TOGETHER TO .185"
 FORM A CABLE CORE
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS .249"
 OVERALL CABLE DIAMETER

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 TEMPERATURE RATING, MIN. -20°C
 WT./M', NOM., NET. 42.3 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 28 PF/FT.
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1000'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464

5) APPLICATION:
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT

6) PRINT:
 QUABBIN 7155 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE
 6. BLUE
 7. BROWN
 8. YELLOW
 9. VIOLET
 10. GRAY

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

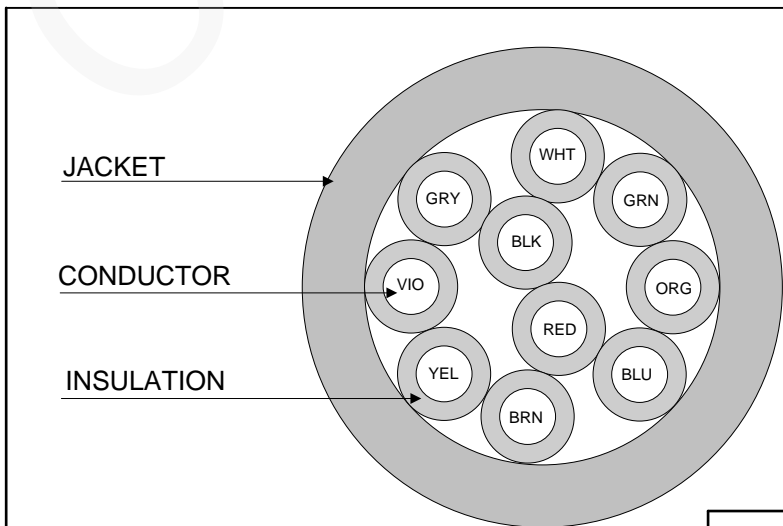

Created 09/21/95	BMD DRAWN: 03/03/16	
REV. 04	CHECKED: GBM 03/04/16	
TITLE 10/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7155	1 of 1

CUSTOMER APPROVAL:

DATE: