

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	.030"
INSULATION:	POLYPROPYLENE, .008" NOM. WALL THICKNESS	.046"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS, PAIRS CABLED TOGETHER ON A COMMON AXIS	.115"
SHIELD:	EACH PAIR WITH AN ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE). A 24 AWG 7/32 STRANDED TINNED COPPER DRAIN WIRE SHALL PROVIDE A COMMON TERMINATION OF SHIELDS.	.118"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .019" NOM. WALL THICKNESS (PRESSURE)	OVERALL CABLE DIAMETER .165"

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	60° C
TEMPERATURE RATING, MIN.	-20° C
WT./M', NOM., NET.	20.8 LBS.

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL, NOM.	35 PF/FT.
CAPACITANCE, GROUNDED, NOM.	62 PF/FT
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V PER ARTICLE 800
D.C. RESISTANCE, MAX.	16.7 Ω/1,000'
IMPEDANCE, CHARACTERISTIC, NOM.	45 Ω
ATTENUATION	4.4dB/100M AT 1MHZ


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 CEC C(UL) TYPE CM

5) APPLICATION:  
 RoHS COMPLIANT MATERIALS

6) PRINT:  
 QUABBIN 7395 TYPE CM C(UL)US 22 AWG SHIELDED -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK X RED  
 2. WHITE X GREEN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

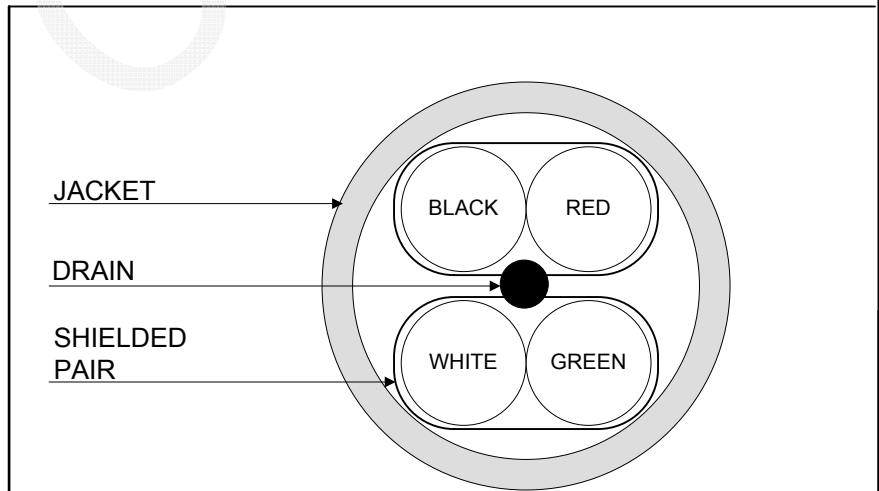

CUSTOMER APPROVAL:

DATE:

Created 09/06/95	DRAWN: BMD 09/29/14	
REV. 07	CHECKED: GBM 09/30/14	
TITLE 4/C ( 2 PR) 22 AWG. SHIELDED PPRO/PVC -- TYPE CM C(UL)US		
QUABBIN P/N	7395	1 of 1