

Cable Assemblies

Connectors

Wire

Ac Power Cords

Keyword, Model #, Digi-Key #

HOME WIRE BIO COMPATIBLE WIRE 30-00455

Model: 30-00455


bio compatible wire

Wire, 3C TS, 28 AWG, 150V, 70C, 2.8 mm, spiral shield, TPU, gray, WBL

[Check Digi-Key Inventory](#)

[View PDF Spec Sheet](#)

[RoHS Certificate](#)

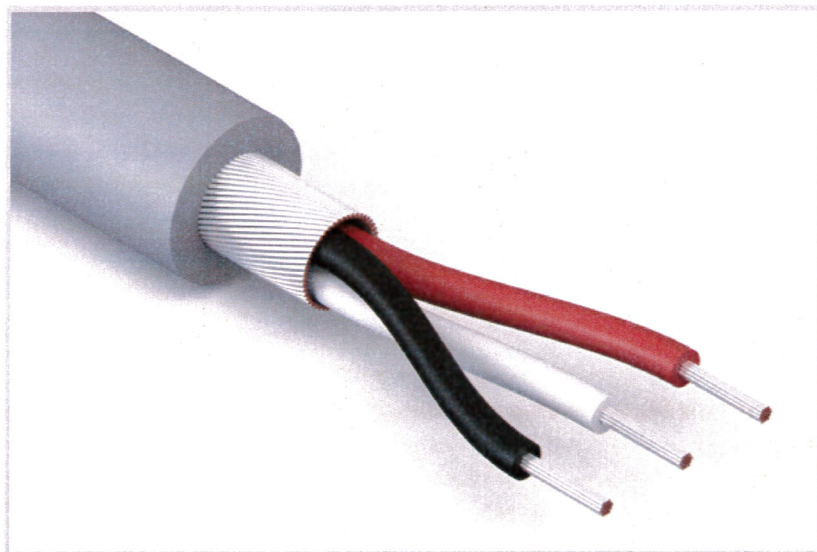

SPECIFICATIONS

shield:	spiral
color:	gray
insulator color:	white, black, red
features:	Phthalate and halogen free
approvals:	ISO 10993
voltage rating:	150 V
shield:	spiral
operating temperature:	70 °C
AWG:	<u>28</u>
# of conductors:	3
jacket material:	TPU
wire outer diameter:	2.8 mm
cable style:	round

[Add to Compare](#)

[ADD TO QUOTE REQUEST](#) ▶

QTY

Tensility supplies cable assemblies, connectors, wire, and ac power cords to electronics manufacturers and entrepreneurial engineering firms throughout the world. We design standard components for a variety of industries, including wearables, LED lighting, film-making, electronics, and automation. Our standard components can easily be customized to fit any application,

CUSTOMER CARE

Toll-free: 1-877-670-7118

Español: 541-323-4205

info@tensility.com

Tensility International Corporation
20802 Sockeye Place, Suite 130
Bend, OR 97701

GET TO KNOW US

[Who We Are](#)
[Exotic Cables & Products](#)
[Life in Bend Blog](#)
[Careers](#)
[Press Room](#)

PRODUCTS

[Cable Assemblies](#)
[Surplus Stock](#)
[Connectors](#)
[Wire](#)
[Ac Power Cords](#)
[Request Quote](#)

ENGINEERING

[Technical & Application Videos](#)
[Part Change Notifications](#)
[End of Life Notifications](#)
[RoHS and REACH](#)
[Conflict Materials](#)
[FAQs](#)