



NORTHWIRE RESTRICTED


This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

DESC: 14/4 CABLE 105°C 300V
 SCALE: 15x DATE: 11/17/05 DR. BY: DP LANGER
 CUSTOMER: INDUSTRIAL ELECTRIC CUSTOMER P/N: TRC1404S-0-V4X6

DWI NO: 1404C016
 NMI NO: FCAB144-008

ITEM	SPECS.
A.	14 GAUGE SXL CONDUCTORS SUPPLIED BY IEWC GROSS LINKED POLYETHYLENE INSULATION .141 O.D.
B.	30 MILS PRESSURED PVC JACKET 105°C 300V 24 MILS MIN. PVC JACKET BLACK JACKET CABLE IS NOT UL OR CSA APPROVED

RoHS COMPLIANT MATERIALS

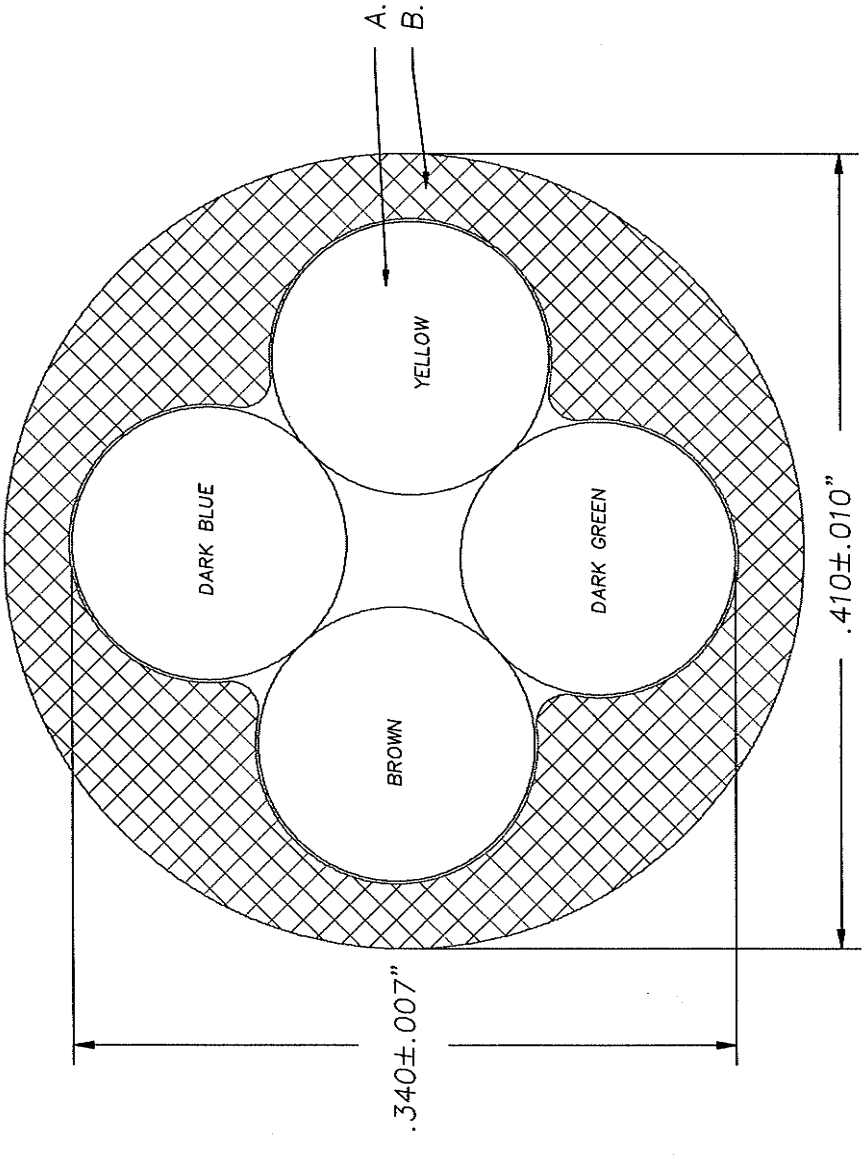

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

use as R0067261

(Signature) *11-21-05*

INITIAL RELEASE	A	11/17/05	DPL
REVISION RECORD	REV	REV DATE	APPROVAL