

RATINGS / APPROVALS

200°C - 300 Volts - UL Style 1332 / CSA 180°C AWM I A/B FTI

200°C - 600 Volts - UL Style 1330 / CSA 180°C AWM I A/B FTI

RoHS Compliant

VW-I Rated

CONSTRUCTION

Conductors

24 AWG - 2/0 AWG

Stranded tinned copper or nickel-plated copper
(Other conductor materials available)

Insulating System


Extruded Fluorinated Ethylene Propylene (FEP)

Standard Color Coding

Available in Colors

CHARACTERISTICS

- Outstanding chemical and fluid resistance.
- Easily stripped and terminated.
- Heat age and ozone resistant.
- Mechanical toughness and low coefficient of friction allows "pull" installation of long wire lengths.
- Smaller outside diameter than equivalent silicone rubber products.

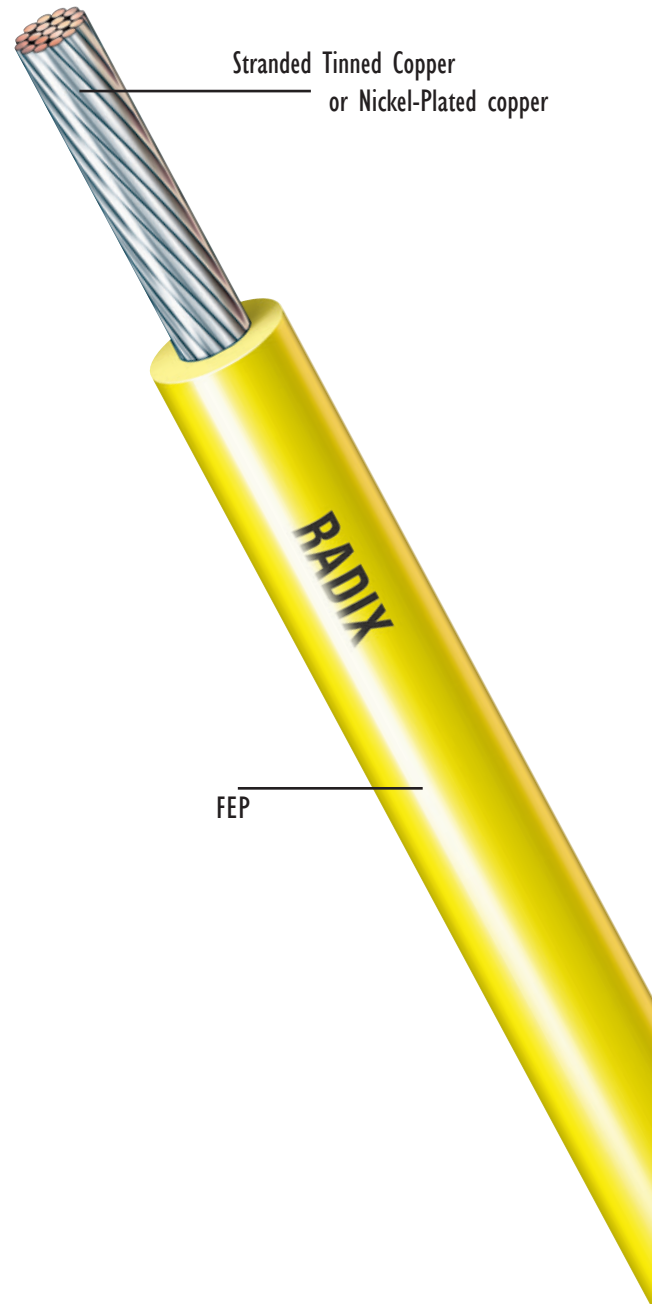

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

SPECIFICATIONS

FEP 200 HIGH-TEMPERATURE LEAD WIRE

FEP 200C/300V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km	Min. Bend Radius (in)	UL	CSA 180C
FFA24P007	24	7	0.052	1.32	3	4.41	0.42	I332	AWM I A/B FT I
FFA22P007	22	7	0.058	1.47	4	6.07	0.46	I332	AWM I A/B FT I
FFA20P007	20	7	0.065	1.65	5	7.99	0.52	I332	AWM I A/B FT I
FFA18T007	18	7	0.074	1.88	8	11.19	0.59	I332	AWM I A/B FT I
FFA16T007	16	7	0.086	2.18	11	16.34	0.69	I332	AWM I A/B FT I
FFA14T007	14	7	0.099	2.51	15	23.04	0.79	I332	AWM I A/B FT I
FFA12T019	12	19	0.116	2.95	24	36.42	0.93	I332	AWM I A/B FT I
FFA10T019	10	19	0.139	3.53	37	55.57	1.11	I332	AWM I A/B FT I

FEP 200C/600V

Part No..	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km	Min. Bend Radius (in)	UL	CSA 180C
FHA24P007	24	7	0.066	1.68	4	6.24	0.53	I330	AWM I A/B FT I
FHA22P007	22	7	0.072	1.83	5	8.11	0.58	I330	AWM I A/B FT I
FHA20P007	20	7	0.079	2.01	7	10.24	0.63	I330	AWM I A/B FT I
FHA18T007	18	7	0.088	2.24	9	13.72	0.70	I330	AWM I A/B FT I
FHA16T007	16	7	0.100	2.54	13	19.26	0.80	I330	AWM I A/B FT I
FHA14T007	14	7	0.113	2.87	18	26.54	0.90	I330	AWM I A/B FT I
FHA12T019	12	19	0.130	3.30	27	40.27	1.04	I330	AWM I A/B FT I
FHA10T019	10	19	0.153	3.89	40	60.15	1.22	I330	AWM I A/B FT I
FHA08T061	8	61	0.202	5.13	69	102.36	1.62	I330	AWM I A/B FT I
FHA06T084	6	84	0.273	6.93	105	156.80	2.18	I330	AWM I A/B FT I
FHA04T133	4	133	0.322	8.18	159	236.38	2.58	I330	AWM I A/B FT I
FHA02T377	2	377	0.390	9.91	244	362.92	3.12	I330	AWM I A/B FT I
FHA01T377	1	377	0.461	11.71	324	482.17	3.69	I330	AWM I A/B FT I
FHAX1T377	1/0	377	0.506	12.85	400	595.01	4.05	I330	AWM I A/B FT I
FHAX2T377	2/0	377	0.559	14.20	494	735.89	4.47	I330	AWM I A/B FT I

Standard conductor: Tinned Copper (Standard conductor for 20-22 AWG ONLY: Nickel Plated Copper - 2%)
Consult factory for alternative conductor and stranding options.

All dimensions listed above are nominal

Compliance: UL Listed File No. E22244. CSA Certified File No. LL13427 or LL80670

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.



WIRE & CABLE

EST. 1944

Radix Wire & Cable

26000 Lakeland Boulevard, Euclid, OH 44132

Tel: 216 731-9191 • Fax: 216 731-7082

www.radix-wire.com