

BRAIDLESS SILICONE 200

HIGH-TEMPERATURE LEAD WIRE

200C/600V

RATINGS / APPROVALS

200°C - 600 Volts - UL Style 3530, 3135, 3268, 3512 / CSA AWM

CONSTRUCTION

Conductors

24 AWG - 500 MCM

Stranded tinned copper or nickel-plated copper
(Other conductor materials available)

Insulating System

Extruded Silicone Rubber


Standard Color Coding

Available in Colors or Striped Combinations

CHARACTERISTICS

- Silicone formulations suitable for UV, ozone, moisture exposure.
- Not suited for immersed applications.
- Suitable for applications to -60°C.
- Superior flexibility.

150°C version with flexible stranded conductor
(UL Style 3529, 3133, 3134) and 200°C/300V (UL Style 3367) are
available. (consult factory)

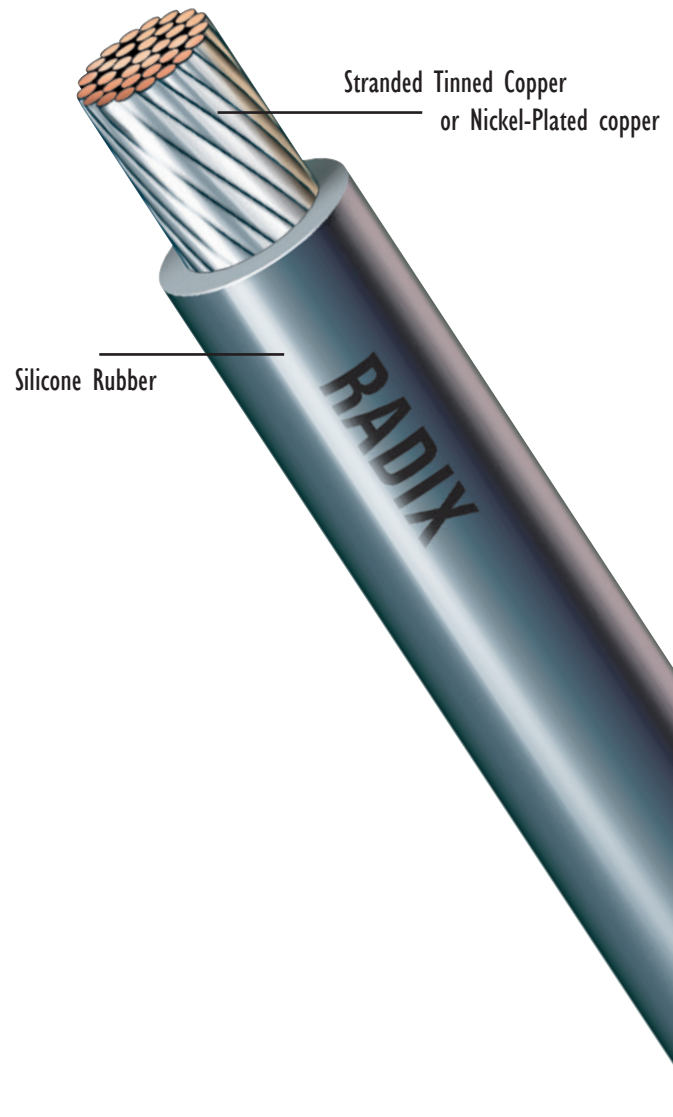

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

Radix[™]

WIRE & CABLE
EST. 1944

BRAIDLESS SILICONE 200

HIGH-TEMPERATURE LEAD WIRE

SPECIFICATIONS

BRAIDLESS SILICONE 200C/600V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt (lbs/Mft)	Wgt (kg/km)	Min. Bend Radius (in)	UL	CSA 180C
JDA24P007	24	7	0.086	2.18	4	6.61	0.69	3530/3512/3135	AWM I A FT2
JDA22P007	22	7	0.092	2.34	6	8.41	0.74	3530/3512/3135	AWM I A FT2
JDA20P007	20	7	0.099	2.51	7	10.46	0.79	3530/3512/3135	AWM I A FT2
JDA18T007	18	7	0.108	2.74	9	13.84	0.86	3530/3512/3268/3135	AWM I A FT2
JDA16T007	16	7	0.120	3.05	13	19.61	0.96	3530/3512/3268/3135	AWM I A FT2
JDA14T007	14	7	0.133	3.38	18	26.22	1.06	3530/3512/3268/3135	AWM I A FT2
JDA12T019	12	19	0.150	3.81	27	39.94	1.20	3530/3512/3268/3135	AWM I A FT2
JDA10T019	10	19	0.205	5.21	46	67.73	1.64	3530/3512	AWM I A/B FT2
JDA08T061	8	61	0.266	6.76	76	113.05	2.13	3530/3512	AWM I A/B FT2
JDA06T084	6	84	0.337	8.56	114	169.66	2.70	3530/3512	AWM I A/B FT2
JDA04T133	4	133	0.371	9.42	155	231.39	2.97	3530/3512	AWM I A/B FT2
JDA02T259	2	259	0.436	11.07	235	349.13	3.49	3530/3512	AWM I A/B FT2
JDA01T259	1	259	0.507	12.88	303	450.25	4.06	3530/3512	AWM I A/B FT2
JDAX1T259	1/0	259	0.562	14.27	384	570.84	4.50	3530/3512	AWM I A/B FT2
JDAX2T259	2/0	259	0.609	15.47	473	704.20	4.87	3530/3512	AWM I A/B FT2
JDAX3T259	3/0	259	0.658	16.71	583	868.21	5.26	3530/3512	AWM I A/B FT2
JDAX4T259	4/0	259	0.718	18.24	722	1074.58	5.74	3530/3512	AWM I A/B FT2
JDA25T427	250 MCM	427	0.817	20.75	872	1297.12	6.54	3530/3512	AWM I A/B FT2
JDA35T427	350 MCM	427	0.926	23.52	1185	1763.77	7.41	3530/3512	AWM I A/B FT2
JDA50T427	500 MCM	427	1.056	26.82	1622	2413.85	8.45	3530/3512	AWM I A/B FT2

Standard conductor: Tinned Copper (Standard conductor for 20-22 AWG ONLY: Nickel Plated Copper - 2%)

Consult factory for alternative conductor and stranding options.

All dimensions listed above are nominal

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.

RadixTM

WIRE & CABLE

EST. 1944

Radix Wire & Cable

26000 Lakeland Boulevard, Euclid, OH 44132

Tel: 216 731-9191 • Fax: 216 731-7082

www.radix-wire.com