

DESCRIPTION: 16/3 PARALLEL 80C 300V

UNITS: IN

SCALE: 12:1

ITEM

SPECIFICATIONS

CUSTOMER: IEWC

NWI P/N: TBD

DWG NO: 50272-1

A.

16 GAUGE 19x29BC BUNCHED

CUSTOMER P/N: TBD

DRAWN BY: DP LANGER

DATE: 6/4/2014

REV: 1

B.

23 MIL MIN. PVC INSULATION 80C 300V
20 MIL MIN. PVC INSULATION
O.D. .105 ± .002"



C.

5 MIL PRESSURED PVC JACKET 80C 300V
4 MIL MIN. PVC JACKET CLEAR JACKET
NO AGENCY APPROVALS

ROHS COMPLIANT MATERIALS TO EU DIRECTIVE
2011/65/EU

EXTRUDED STRIPES ON CONDUCTORS

CORE DIMENSIONS FOR INTERNAL USE ONLY

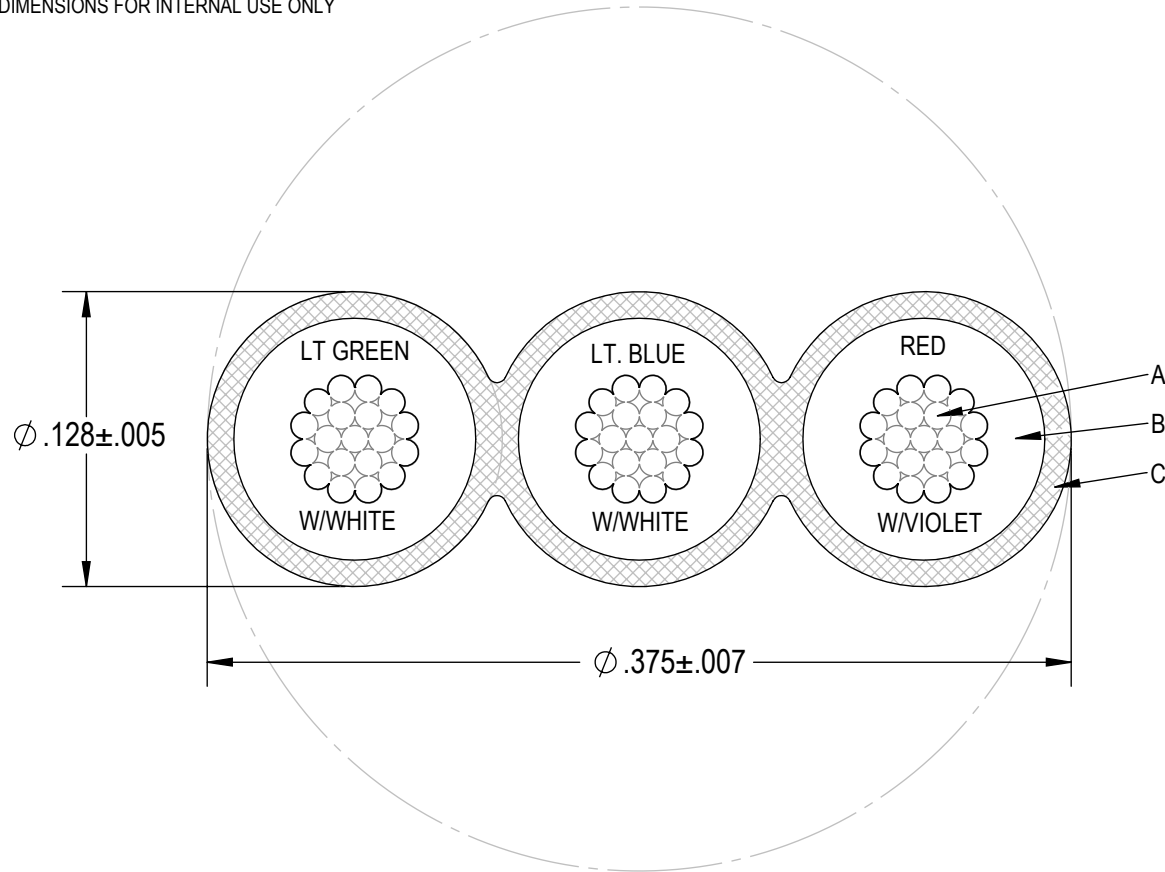

ISOMETRIC VIEW
FOR REFERENCE ONLY

LEGEND SPECIFICATIONS NO MARKING ON CABLE



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 16/3 PARALLEL 80C 300V

UNITS: IN

SCALE: 60:1

ELECTRICAL REQUIREMENTS

CUSTOMER: IEWC

NWI P/N: TBD

DWG NO: 50272-1

NONE SPECIFIED

CUSTOMER P/N: TBD

DRAWN BY: DP LANGER

DATE: 6/4/2014

REV: 1



MECHANICAL REQUIREMENTS

NONE SPECIFIED

INITIAL RELEASE	1	6/4/14	DPL
REVISION RECORD	REV.	REV DATE	APR
REVISIONS			