

PRODUCT SPECIFICATION

DATE	REV	ECN	DESCRIPTION
10/14/2008	C	20716	CHG TEMP TO 80C


Parent Number: FRC007-C

Description: 18/2 16/30 BC GPT Rip Cord

Stranding: 16/30 BC LHL

Style: GPT per SAE J1128

Insulation: PVC

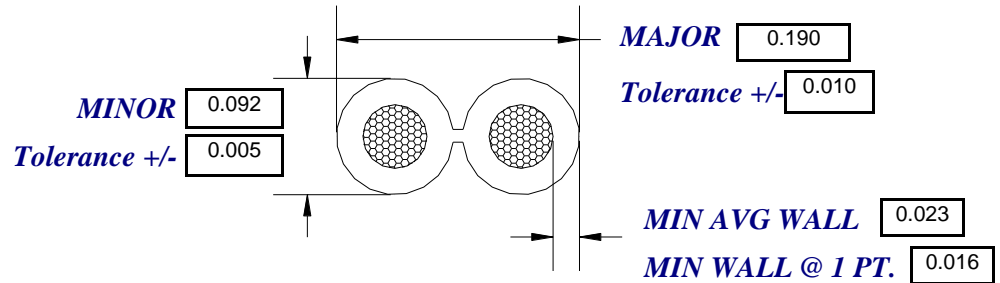

Print Legend: NO PRINT

Temperature: The Temperature Class Rating is 80C. The Temperature Class rating is defined by SAE as " a class designation based on the retention of mechanical properties after 168 hours of aging at 30C above the temperature class rating".

Voltage: Per SAE J 1128 this product is intended for use at a nominal system voltage of 60 Volts DC or less in surface vehicle electrical systems.

Notes:

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE

1530 Shields Drive
Waukegan, IL 60085

Phone: 800-323-9355

www.colemancable.com

