


Speaker Wire

UL Listed or AWM Style 1007

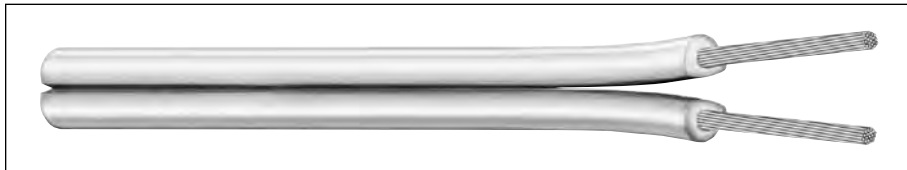

| CATALOG NUMBER | NUMBER OF COND. | AWG SIZE | COND. STRAND | NOM. INSULATION THICKNESS | | NOMINAL O.D. | |
|-------------------------|-----------------|----------|--------------|---------------------------|------|--------------|-----------|
| | | | | INCHES | mm | INCHES | mm |
| UL LISTED (60°C) | | | | | | | |
| C1356 | 2 | 24 | 7/32 | 0.016 | 0.41 | 0.058x0.117 | 1.47x2.79 |
| C1362 | 2 | 22 | 7/30 | 0.020 | 0.51 | 0.070x0.145 | 1.77x3.68 |
| C1360 | 2 | 20 | 10/30 | 0.020 | 0.51 | 0.085x0.160 | 2.16x4.06 |
| C1357 | 2 | 18 | 16/30 | 0.020 | 0.51 | 0.083x0.181 | 2.11x4.60 |
| C1358 | 2 | 16 | 26/30 | 0.020 | 0.51 | 0.105x0.210 | 2.67x5.33 |
| C1361 | 2 | 14 | 41/30 | 0.025 | 0.64 | 0.125x0.235 | 3.18x5.69 |
| C1363 | 2 | 12 | 65/30 | 0.025 | 0.64 | 0.154x0.323 | 3.91x8.20 |

Color Code Chart

| ORDERING SUFFIX | COLORS |
|-----------------|--------|
| 01 | Black |
| 02 | White |
| 08 | Brown |
| 10 | Gray |
| 90 | Clear |

Product Construction:

Conductor:

- 24 thru 12 AWG fully annealed one bare, one tin stranded copper per ASTM B-174

Insulation/Jacket:

- Premium-grade PVC
- Color code: See chart below

Applications:

- Digital audio
- Hi-fi and stereo speaker wire
- Jukeboxes
- Not for in-wall use
- Home theater

Compliances:

- UL Wires Misc.
- RoHS Compliant Directive 2002/95/EC

Packaging:

- Please contact Customer Service for packaging and color options



| CATALOG NUMBER | NO. OF COND. | AWG SIZE | COND. STRAND | NOM. INSULATION THICKNESS | | NOMINAL O.D. | |
|-------------------------------------|--------------|----------|--------------|---------------------------|------|--------------|------|
| | | | | INCHES | mm | INCHES | mm |
| AWM STYLE 1007 (80°C, 300 V) | | | | | | | |
| C7102A | 2 | 18 | 7/.0152 | 0.020 | 0.51 | 0.172 | 4.37 |

Color Code Chart

| ORDERING SUFFIX | STOCK COLOR |
|-----------------|-------------|
| 99 | Black-White |

Product Construction:

Conductor:

- 18 AWG tinned annealed stranded copper
- Stranded tinned copper per ASTM B-33

Insulation:

- Premium-grade, color-coded PVC
- Temperature range: -30°C to +80°C
- Color code: See chart below

Applications:

- Audio systems
- Not for in-wall use

Compliances:

- UL Style 1007 (UL: 80°C, 300 V)

Packaging:

- 1000' (305 m) reels

