

yellobrik®

RFR 1000

yellobrik 19" 1RU Rack Frame

- Compact 1 RU design
- Will accommodate up to 14 yellobriks
- External 12VDC power inputs
- Primary and redundant power options
- Power failure alarm GPO outputs



The RFR 1000 is a compact 1 RU high mounting frame designed for yellobriks. Up to 14 yellobriks can be vertically mounted and are mechanically clamped securely in place. Each slot has its own integrated power connector on a central power bus.

The rack has two external 12VDC inputs for power, one for primary power, the second for redundant backup. An optional external power brick is available which provides enough power for any combination of yellobriks. A second unit can be used for redundant backup.


Primary and redundant power LED's are located in the front panel as well as GPO connections for the power supply failure alarms.

While the frame will accommodate all yellobriks, it is ideally suited for the yellobrik fiber converters, which are typically used in larger numbers. Fiber connections are on the front and the SDI copper connection in the rear. A space is left open on one side to route the fiber loops from front to rear making for a very clean installation. The module fiber RX and TX activity LED's can be seen clearly from the front with the modules installed.




Technical Specifications

Power Inputs	External +12VDC primary power input External +12VDC redundant power input Connector: Molex Mini Fit Series5557 Power LED's on front of chassis Primary and redundant power failure GPO alarm outputs
Size	19" Rack mount x 1RU high x 145mm deep (5.7")
Weight	1.6 Kg (3.52 Lbs) - with no modules installed
Model #	RFR 1000 (EAN 4250479310001)
Options	RPS 1000 external power supply (12V 8A) (use 2 units for primary and redundant power protection)
Includes	Rack Frame assembly (empty)

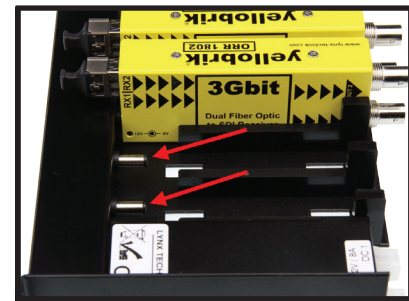

Power connectors on integrated power bus

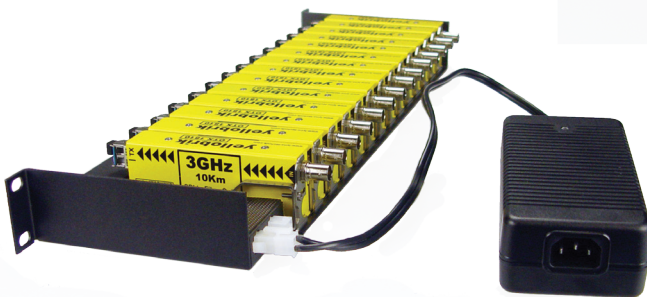

Rear of rack frame showing power connectors and one optional external power brick (use second brick for redundant protection)



Modules are clamped securely into position

Specifications subject to change

LYNX Technik AG®

www.lynx-technik.com

LYNX Technik AG
Brunnenweg 3
D-64331 Weiterstadt
Germany
PH +49 (0) 6150 1817 0
info@lynx-technik.com

LYNX Technik Inc
26366 Ruether Ave.
Santa Clarita, CA 91350
USA
PH +1 (661) 251 8600
infousa@lynx-technik.com

LYNX Technik Pte Ltd
19 Burn Road
#01-01 Advance Building
Singapore, 369974
PH +65 648 1622
infoasia@lynx-technik.com