




PART NO. **RFU-600-6**


REV	DESCRIPTION	DMN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	6/29/01	JDMC
A	ADDED CRIMP DIES	CZS	08/26/08	JDMC

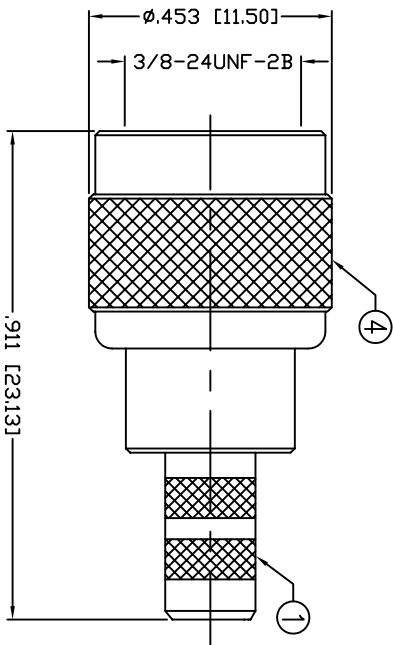

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .213"

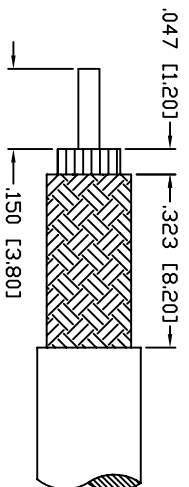

RECOMMENDED STRIPPING INSTRUCTIONS

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-2.5 GHz  
 VSWR: 1.25 MAX.  
 WORKING VOLTAGE: 335 V rms Max. @ Sea Level  
 INSULATION RESISTANCE: 5k M Ohms min.  
 TEMPERATURE RANGE: -65°C TO 165°C  
 FOR RG-58, 58A, 58C, 141, 141A, BELDEN 8240, 9907  
 8259, 8262, 9201, 9203, 9310, 9311 & COMM/SCOPE 0268

#	DESCRIPTION	QTY	MATERIAL	FINISH
5	FERRULE	1	BRASS	NICKEL, 100μ"
4	SHELL	1	BRASS	NICKEL, 100μ"
3	PIN	1	BRASS	SILVER 5μ"
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	NICKEL, 100μ"

CUSTOMER OUTLINE DRAWING ALL DIMENSIONS ARE REFERENCE ONLY UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		DRAWN C. ZUNIGA 08/26/08
DRG DRAWN C. ZUNIGA 9/10/02		

**ROHS COMPLIANT**

PROPRIETARY AND CONFIDENTIAL  
 THIS DRAWING CONTAINS  
 INFORMATION PROPRIETARY TO  
 RF INDUSTRIES. ANY  
 UNAUTHORIZED USE OF THIS  
 DRAWING IS EXPRESSLY  
 PROHIBITED WITHOUT WRITTEN  
 PERMISSION FROM RF  
 INDUSTRIES. ANY VIOLATION IS  
 PUNISHABLE UNDER U.S.  
 COPYRIGHT LAWS.

**RF COMMUNICATORS**  
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

7610 MIRAMAR RD.  
 SAN DIEGO, CA 92126  
 (858) 549-6340

**MINI UHF PLUG**  
 CRIMP

SIZE	CABLE GROUP	DMG NO.	REV
A	C	<b>RFU-600-6</b>	A

SCALE: NTS  
 ENGINEERING ID: 001560  
 SHEET 1 OF 1