


**Thermax**  
 501 Pennsylvania Parkway, Suite 100, Indianapolis, IN  
 46280, US  
 Phone: 800-423-5873  
 Email: sales.thermax@thermaxcdt.com  
 Website: http://www.thermaxcdt.com

All Categories > High-Performance Coaxial Cables > MIL-C-17 coaxial and twinaxial cables > Item # M17/094-RG179

**Item # M17/094-RG179, MIL-C-17 coaxial and twinaxial cables**

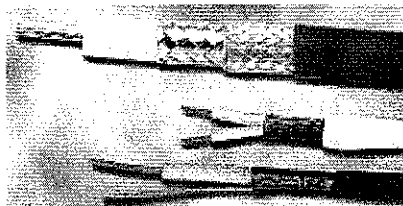

[larger image](#)

**MIL-C-17 coaxial and twinaxial cables**

Thermax/CDT Mil-C-17 cables are constructed with either solid or stranded silver plated conductors insulated with an extruded PTFE (polytetrafluoroethylene) dielectric. The outstanding electrical and mechanical properties of PTFE over a broad range of temperatures and frequencies make these Thermax/CDT coaxial cables the standard for a wide range of military and commercial applications.

**Specifications**

<b>Conductor Diameter - inches (mm)</b>	.012 (.057)
<b>Conductor Type</b>	7/38 SPCW (Silver-plated copperweld (copper-covered steel))
<b>Impedance</b>	75Ω
<b>Max. Working Voltage</b>	900
<b>Jacket Diameter - inches (mm)</b>	.100 (2.54)
<b>Capacitance (pF/ft)</b>	23.0 (75.4)
<b>Weight - pounds/1000 feet (Kg/1000 M)</b>	9.83 (14.6)
<b>Attenuation @ 400 MHz (dB/100 ft.)</b>	21.0
<b>Insulation Diameter - inches (mm)</b>	.063 (2.06)
<b>Jacket Type</b>	Extruded FEP (Fluorinated Ethylene Propylene)
<b>Insulation Type</b>	Extruded PTFE (polytetrafluoroethylene)
<b>Braid Type</b>	Single 38 SPC (Silver-plated copper)
<b>Braid Diameter - inches (mm)</b>	.081 (2.06)
<b>Max. Conductor Resistance - Ohm/100 ft. (ohm/100 meters)</b>	24.5 (80.2)
<b>Min. Dielectric Strength - KV RMS</b>	2.00
<b>Min. Corona Extinction - KV RMS</b>	1.20
<b>Max. Power @ 100 MHz (Watts)</b>	880
<b>Max. Power @ 400 MHz (Watts)</b>	420
<b>Max. Power @ 1 GHz (Watts)</b>	260
<b>Thermax Type</b>	RGU-179