


TITLE	PART No.	REV	PAGE
50 Ohm Coaxial Cable, 26 AWG, FEP Jacket	50HCX-88	X1	1 of 1

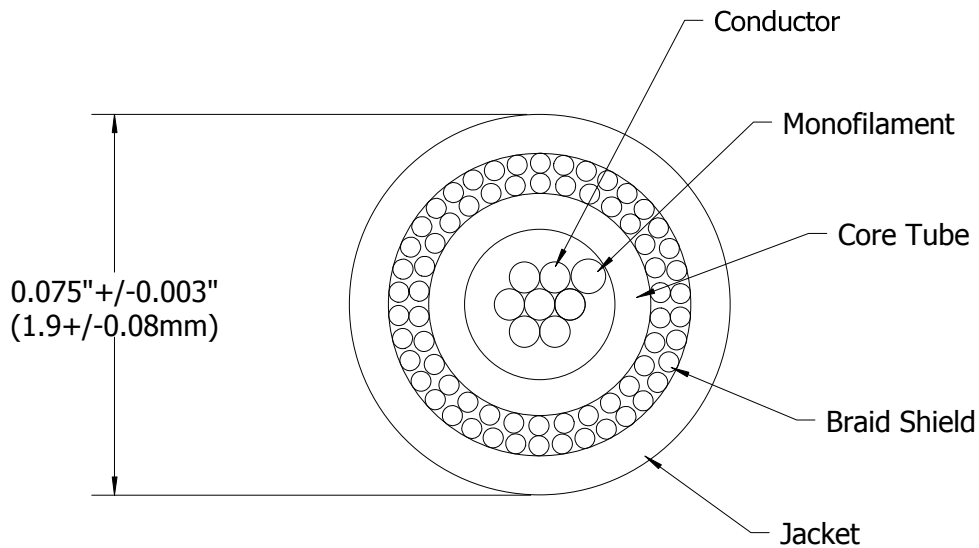

NOTES

Conductor: 26 AWG, 7/34, SPC
 MonoFilament: PFA, Helically wrapped around Conductor
 Color: Blue
 Core Tube: FEP, 0.044" (1.12mm) OD
 Braid Shield: 38 AWG, SPC, >90% Coverage
 Jacket: FEP, 0.007" (0.18mm) Wall Thickness
 Color: Blue

Impedance: 50 +/- 1 Ohms
 Capacitance: 23.8 pF/ft Nom. (78 pF/m)
 Propagation Delay: 1.19 ns/ft Nom. (3.9 ns/m)
 Dielectric Strength: 500 Vrms
 Attenuation: <20 dB/100ft @ 400 MHz

Weight: 6 lbs/1000ft

UL Style: 11246

This document is the property of TEMP-FLEX. If may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	X1	3091	Preliminary Release.	KP	10/16/12