

### RCA Pin Connectors

#### RCAP-C Series (Straight Plug, Crimp Type)

Model	Suitable Cable		Center Pin	Sleeve	Boot	Die Set
	Canare	Belden (suggested)				
* RCAP-C25F	L-2.5CFB	1855A, 8218, 1417B, 1418B	B11014E	★ BN7029C	—	TCD-35CA
RCAP-C25HD	L-2.5CHD	—	B11015E	★ BN7129	—	TCD-35CA
RCAP-C3A	L-3C2VS, L-3C2V, V*-3C	—	B11014E	BN7003A	CB24	TCD-35CA
* RCAP-C3GS	GS-6	—	★ BN1093	★ BN7079	CB25	TCD-35D
RCAP-C3F	L-3CFB, LS-3CFB, V*-3CFB	—	B11015E	BN7003A	CB24	TCD-35CA
* RCAP-C42	—	1505F	B11016E	★ BN7011	—	TCD-31C
RCAP-C4A	LV-61S	8241, 8279, RG-59B/U	B11015E	BN7015A	CB25	TCD-4CA, TCD-451CA
RCAP-C4F	L-4CFB, LS-4CFB, V*-4CFB	1505A, 8212, 8241F, 9167, 9259, 9659	B11016E	BN7015A	CB25	TCD-4CA, TCD-451CA
RCAP-C53	L-4.5CHD	1694A, 9066, 9116, 9118, 9248	B11020D	★ BN7046	CB26	TCD-35CA
RCAP-C5A	L-5C2VS, L-5C2V, V*-5C	—	B11016E	BN7016	CB26	TCD-35CA
RCAP-C5F	L-5CFB, LS-5CFB, V*-5CFB	—	B11020D	B75004A	CB26	TCD-5CF, TCD-55FA
RCAP-C77	LV-77S	8281F	B11016E	B75004A	CB26	TCD-5CF, TCD-55FA

•Standard package (20pcs / 100pcs)

★Production by order. Please ask us for ordering lot.

- The crimp design ensures fast and reliable cable connection.
- The crimp tool for the RCAP-C can be used for the Canare crimp BNC plugs as well, thus saving on extra equipment.

Be sure to use the Canare crimping tool for installing connectors on cables.

#### RCA Soler Plugs

Model	Description
F-09	RCA Pin Plug
F-10	RCA Pin Plug (Long sleeve)

•Standard package (10pcs)

- Offer strong cable clamping that prevents severed lines.
- Suited to cables up to 6.0mm $\varnothing$  in size.
- Accommodates cables up to 7.5mm $\varnothing$  in size when spring removed.

#### RCA Recessed Bulkhead Receptacles

Model	Description
RJ-RU	Jack to Solder Cup
RJ-BCJRU	RCA (F) - BNC (F)
RJ-RUD	Jack to Solder Cup, Neutrik D Type
RJ-RUDB	Jack to Solder Cup, Neutrik D Type (Black)
RJ-BCJRUD	RCA (F) - BNC (F), Neutrik D Type
RJ-BCJRUDB	RCA (F) - BNC (F), Neutrik D Type (Black)

•Standard package (20pcs / 100pcs) by insulation color.


- Two types of flange are available: ITT XLR-F77 and Neutrik D compatible.
- VSWR is 1.1 or less up to 50MHz, enabling their use with HDTV and computer graphics video signals.
- Color-coded insulation enables users to easily distinguish between the R, G and B elements. Users can choose as required from five colors, including red, green, blue, yellow and white.

#### Phone Plugs

Model	Description
F-11	Mini Phone TS
F-12	Mini Phone TRS
F-15	1/4" TS Phone
F-16	1/4" TRS Phone

•Standard package (10pcs)

- Featuring a properly cable clamp system ensures long life reliability.
- Suited to cables up to 6.0mm $\varnothing$  in size.
- Accommodates cables up to 7.5mm $\varnothing$  in size when spring removed.

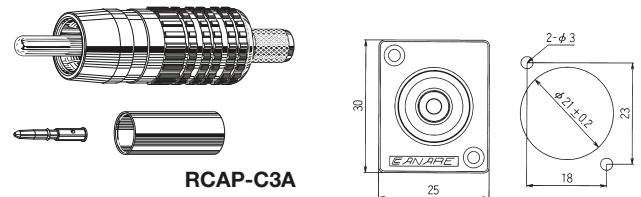


RCAP-C3A




F-09


F-10




RJ-RU



RJ-BCJRU




RJ-RUD



RJ-RU

RJ-BCJRU


RJ-RUD



Canare's durable design



F-11



F-12



F-15



F-16