


**GeneralCable**  
**T-13606 (8/16)**  
**EIGHT CONDUCTOR PENDANT CABLE**

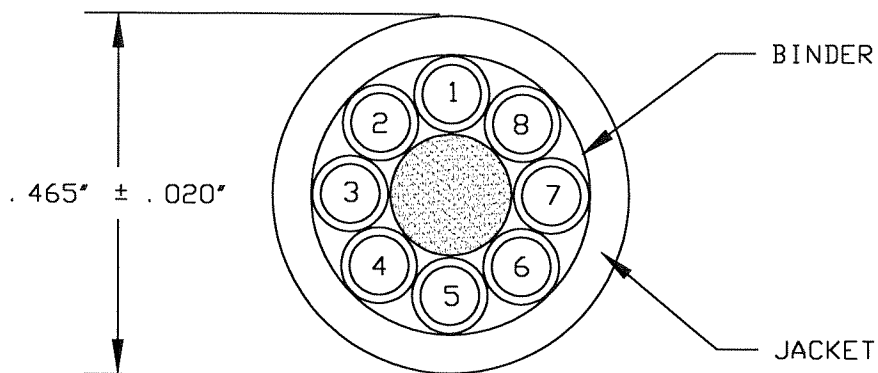

COMPONENT I - CONDUCTOR: #16AWG 65/34 BARE COPPER  
 (ITEMS 1-8) INSULATION: PVC-.015" NOMINAL WALL  
 SHEATH: NYLON (CLEAR)-.005" NOMINAL WALL  
 DIAMETER: .102" NOMINAL

CABLE - CORE: ONE (1) FILLER PULLED IN  
 LAYER I: EIGHT (8) COMPONENT I (ITEMS 1-8) CABLED  
 AROUND CORE WITH A L. H. LAY

BINDER - .002" MYLAR TAPE-25% MINIMUM OVERLAP

JACKET - PVC (YELLOW)-.047" NOMINAL WALL

DIAMETER - .465" ± .020"

NET CABLE WGT. - 135 LBS. /1000'

UL - TYPE MTW

CSA - AWM 90°C 600V

JACKET PRINT- \*IEWC E-51553 8/C 16AWG MTW \*FLEXING\* (UL) 600V/LL-9755  
 CSA AWM IIA 90C 600V FT1/ROHS COMPLIANT\*

COLOR CODE -

ITEM NUMBER	COLOR	PRINT
1	BLACK	1 ONE
2	RED	2 TWO
3	BLUE	3 THREE
4	ORANGE	4 FOUR
5	YELLOW	5 FIVE
6	BROWN	6 SIX
7	RED/BLACK	7 SEVEN
8	GREEN	N/A

REVISIONS	0	08/06/04	FIRST ISSUE	<b>GeneralCable</b> 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>	
	A	12/28/06	UPDATE DRAWING		
DRAWING NO: 12-1594					
REFERENCES	INDUSTRIAL ELECTRIC RPC1608			DRAWN BY: W. DRABEK	APPROVED BY: M. LAJEUNESSE
	GeneralCable P/N 206950.04.06				
	T-13606 (8/16)			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	