


GeneralCable
TEN CONDUCTOR #16AWG TYPE MTW CABLE

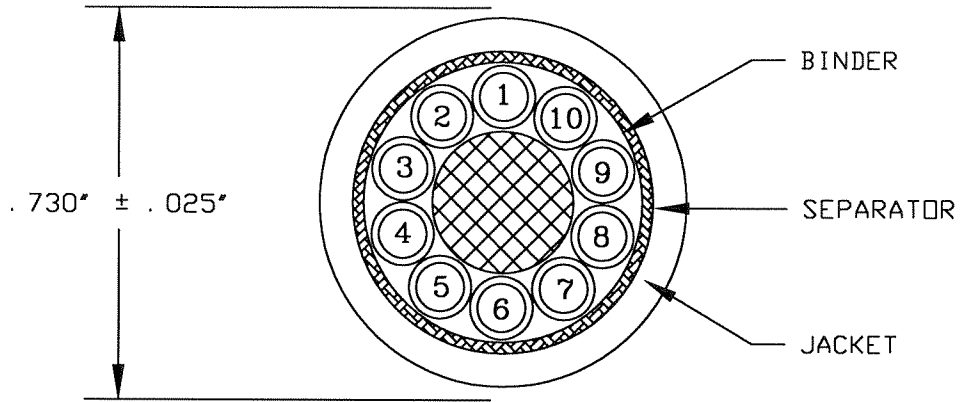

COMPONENT I - CONDUCTOR: #16AWG 65/34 BARE COPPER
(ITEMS 1-10) INSULATION: PVC-.020" NOMINAL WALL
SHEATH: NYLON (CLEAR)-.005" NOMINAL WALL
DIAMETER: .112" NOMINAL

FILLERS - AS REQUIRED TO MAINTAIN A CIRCULAR CABLE

CABLE - CORE: ONE (1) FILLER PULLED IN
LAYER I: TEN (10) COMPONENT I (ITEMS 1-10)
CABLED AROUND CORE WITH A L. H. LAY

BINDER - .001" MYLAR TAPE-25% MINIMUM OVERLAP

SEPARATOR - 26/2 COTTON BRAID-75% MINIMUM COVERAGE

JACKET - PVC (YELLOW)-.100" NOMINAL WALL

DIAMETER - .730" ± .025"

UL- TYPE MTW 90°C 600V
CSA- AWM 90°C 600V
NET CABLE WGT- 270 LBS/1000'

JACKET PRINT- *E-51553 16AWG 10 COND P-H 753 MTW "FLEXING"
(UL) 600V/LL-9755 CSA AWM IIA 90C 600V FT1'

COLOR CODE	ITEM NUMBER	COLOR	PRINT
	1	YELLOW	1 ONE
	2	YELLOW	2 TWO
	3	YELLOW	3 THREE
	4	YELLOW	4 FOUR
	5	YELLOW	5 FIVE
	6	YELLOW	6 SIX
	7	YELLOW	7 SEVEN
	8	YELLOW	8 EIGHT
	9	YELLOW	9 NINE
	10	YELLOW	10 TEN

APPLICABLE SPECIFICATIONS: UL SUBJECT 1063
CSA C22.2 NO. 210.2

REVISIONS	0	10/02/98	FIRST ISSUE	<p>GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>
	A	12/28/06	UPDATE DRAWING	
DRAWING NO: 12-793				
REFERENCES	IEWC/HARNISCHFEGER PART #P-H 753		DRAWN BY: W. DRABEK	APPROVED BY: M. LAJEUNESSE
	GeneralCable P/N 620870		THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	
	T-5565 (10/16)			