
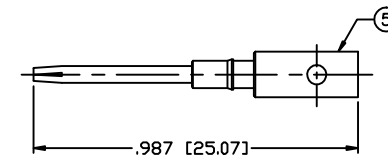
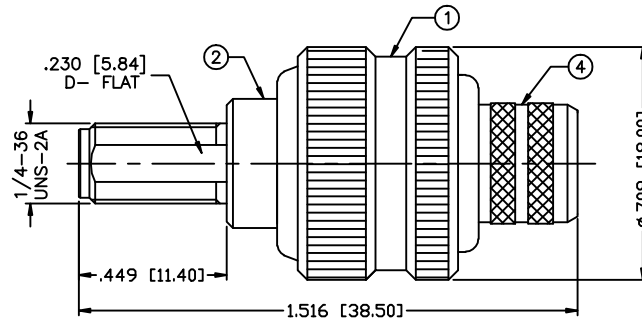


PART NO.



RSA-3252-1I

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	05/29/03	JDMc

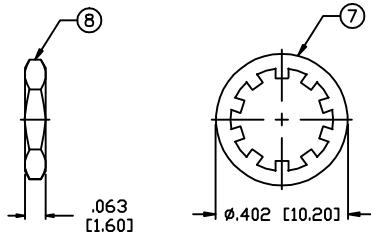

RECOMMENDED CRIMP DIE: .118"/.128"
"SOLDER ONLY" FOR RG-8/U TYPE CABLE

MAXIMUM PANEL THICKNESS: .125"

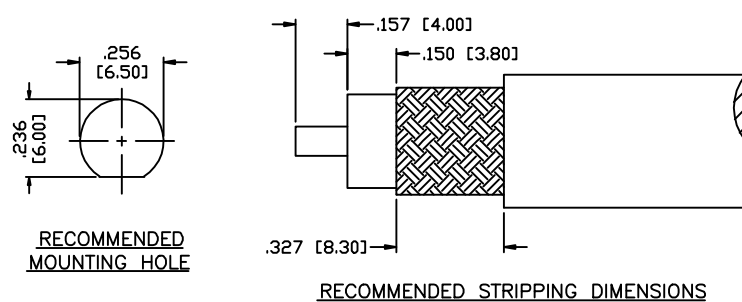

RECOMMENDED CRIMP DIE: .429"

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-12.4 GHz
 VSWR: 1.3 MAX.
 WORKING VOLTAGE: 500 V rms Max. @ Sea Level
 INSULATION RESISTANCE: 5k M Ohms min.
 TEMPERATURE RANGE: -65°C TO 165°C
 FOR BELDEN 8214, 9913, 9913F, 9914, RG-8/U TYPE,
 CAROL C1180, TIMES AA-5886 & LMR-400 CABLE

#	DESCRIPTION	QTY	MATERIAL	FINISH
8	HEX NUT	1	BRASS	GOLD, 3μ"
7	LOCK WASHER	1	BRASS	GOLD, 3μ"
6	FERRULE	1	BRASS	GOLD, 3μ"
5	CONTACT	1	Be.Cu.	GOLD, 50μ"
4	FERRULE STUD	1	BRASS	GOLD, 3μ"
3	INSULATOR	1	PTFE	---
2	SMA BODY	1	BRASS	GOLD, 3μ"
1	BODY	1	BRASS	GOLD, 3μ"

CUSTOMER
OUTLINE DRAWING

ALL DIMENSIONS
ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN
C. ZUNIGA 01/10/11

CHECKED

ORJ DRAWN
C. ZUNIGA 01/10/11

**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

SMA JACK, CRIMP
 BULKHEAD

SIZE	CABLE GROUP	DWG NO.	REV
A	I	RSA-3252-1I	—
SCALE: NTS	ENGINEERING ID: 008974	SHEET 1 OF 1	