



FRONT VIEW
 DB9PIN MALE
 MOLDED GREY

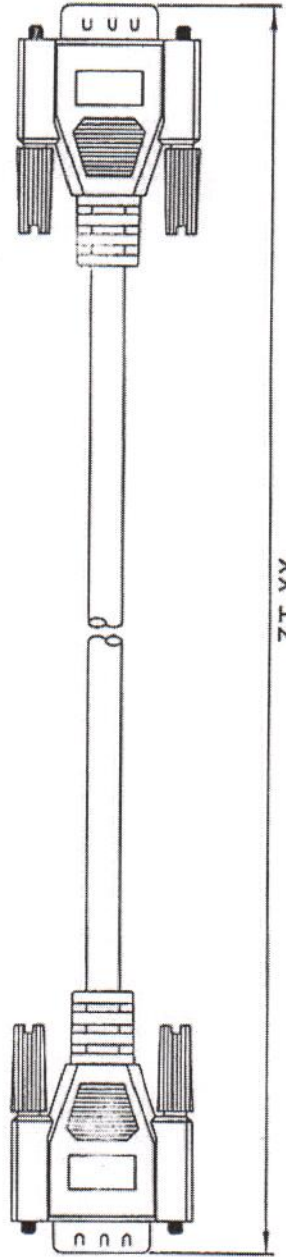

DB9PIN MALE
 MOLDED GREY



FRONT VIEW

***CONSTRUCTION:

1. CABLE: * UL2464 (9C/26AWG)+EA OD:6.0 GRAY JACKET.

***CONNECTORS:

2. DB9 MALE: * D-SUB 9PIN MALE SOLDER TYPE.

* PINS: BRASS WITH GOLD PLATED OVER NICKEL.

* SHELL: STEEL WITH NICKEL PLATED.

* INSULATOR: WHITE COLOR P.B.T UL 94V-0 RATED.

* SCREW: THUMSCREW #4-40 UNC GRAY COLOR.

* SHIELDING: 360° AL-FOIL SHIELDED.

* MOLEDED 45P PVC GRAY.

* CT: 2 ohm IS: 5M ohm.

* PACK EACH CABLE IN A POLY BAG.

* MATERIAL WITH ROHS GRADE.

PIN OUT

DB9M	DB9M
1 BLACK	1
2 BROWN	2
3 RED	3
4 ORANGE	4
5 YELLOW	5
6 GREEN	6
7 BLUE	7
8 PURPLE	8
9 GREY	9
SHELL DRAIN	SHELL

(XX) DENOTES CABLE LENGTH:

AVAILABLE LENGTHS ARE 3 (3 ft), 6 (6 ft), 10 (10 ft), 15 (15 ft), 25 (25 ft), 50 (50 ft) AND 100 (100 ft)

BY	DATE	<p>PAN PACIFIC ENTERPRISES CO., INC</p>	PART NO S-9MM-(XX)	UNITS mm	SCALE NONE	SHEET 1 OF 1
DRAWN						
CHK'D						
APPRV						
MATERIAL	SEE NOTES					
FINISH	SEE NOTES					