

Number of Triads	Size mm ²	Conductor Nominal Diameter	Bedding Nominal Diameter	Braid Nominal Diameter	Overall Nominal Diameter	Bend Radius	Weight Nominal	Item	Description	Material	Dimensions/Comments
		(mm)	(mm)	(mm)	(mm)	(mm)	(kg/km)				
1	1.5	1.5	9.9	11.1	13.6	81	233	1	Conductor	Tinned Annealed Copper	
								2	Insulation	HF-90 to IEC 60092-351	See Table
								3	Shield Tape	Laminated Aluminum/Polyester	
								4	Drain Wire	Tinned Annealed Copper	
								5	Isolation Tape	Polyester	
								6	Bedding	SHF-1 to IEC 60092-359	
								7	Braid	Galvanized Steel	0.3mm (0.0118") Wire Diameter
								8	Separator Tape	Polyester	
								9	Sheath	Blue SHF-1 to IEC 60092-359	See Table


Insulation Colors: White, Black, & Red

Standards

- IEC 60228
- IEC 60092-350
- IEC 60092-376
- IEC 60332-1
- IEC 60332-3-22
- IEC 60754-1 & 2
- IEC 61034-1 & 2

Approvals: LR DNV ABS USCG

Operating Temperature: 90°C
Voltage Rating: 250V

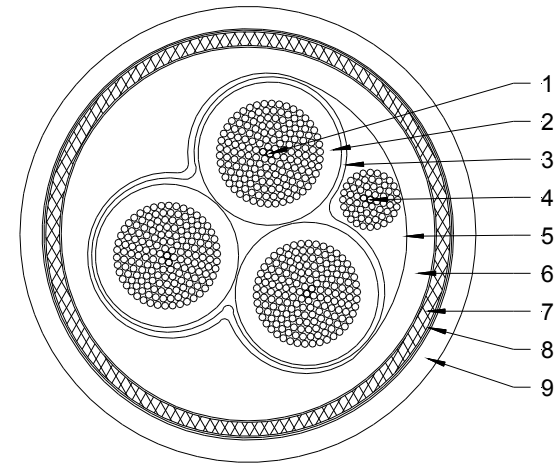

ISO 9001:2008 Registered – Certificate Number C0004991-IS2

CUSTOMER PART NUMBER: UK494302012.007

FLEXIBLE, OFFSHORE, COLLECTIVE SCREENED, BRAIDED/ARMoured, INSTRUMENTATION CABLE

Customer Approval:

Company Name:

Authorized Person Name:

Title:

Signature:

Date:

Drawn By:

Date:

Approved By:

Date:

Catalog Code

T. Socha

20. Aug. 2010

T. DiVozzi

20. Aug. 2010

RBA-DEGD/1T1.5BL

Tricab, Inc.
15 Coppage Drive
Worcester, MA 01603
Tel. 508-421-4680
Fax. 508-421-4681



1	20. Aug. 2010	Initial Release
Issue	Date	Change

TS
By