

Number of Pairs	Size mm ²	Conductor	Bedding	Braid	Overall	Bend Radius (mm)	Weight Nominal (kg/km)	Item	Description	Material	Dimensions/Comments
		Nominal Diameter (mm)	Nominal Diameter (mm)	Nominal Diameter (mm)	Nominal Diameter (mm)			1	2	3	
3	.75	1.2	12.8	14.0	17.0	102	320	1	Conductor	Tinned Annealed Copper	
								2	Insulation	HF-90 to IEC 60092-351	See Table
								3	Shield Tape	Laminated Aluminum/Polyester	
								4	Drain Wire	Tinned Annealed Copper	
								5	Isolation Tape	Polyester	
									Filler	Polypropylene	Not applicable
								6	Shield Tape	Laminated Aluminum/Polyester	
								7	Drain Wire	Tinned Annealed Copper	
								8	Isolation Tape	Polyester	
								9	Bedding	SHF-1 to IEC 60092-359	
								10	Braid	Galvanized Steel	0.3mm (0.0118") Wire Diameter
								11	Separator Tape	Polyester	
	Ripcord	High Strength Aramid Yarn	Not shown in illustration								
12	Sheath	Grey SHF-1 to IEC 60092-359	See Table								


Insulation Colors: White and Black with printed Numbers & Words 1 through 3

Standards

- IEC 60228
- IEC 60092-350
- IEC 60092-376
- IEC 60331
- IEC 60332-1
- IEC 60332-3-22
- IEC 60754-1 & 2
- IEC 61034-1 & 2

Approvals: LR DNV ABS USCG

Operating Temperature: 90°C
Voltage Rating: 250V

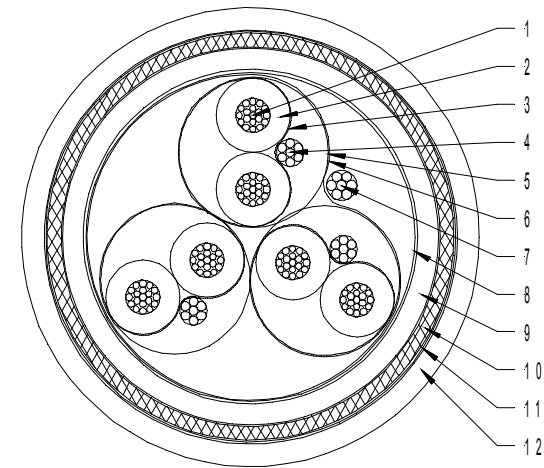

ISO 9001:2008 Registered – Certificate Number C0004991-IS2

CUSTOMER PART NUMBER: UK494302012.102 UK494302022.102

FLEXIBLE, OFFSHORE, INDIVIDUAL & COLLECTIVE SCREENED, BRAIDED/ARMORED, INSTRUMENTATION CABLE

Customer Approval:

Company Name:

Authorized Person Name:

Title:

Signature:

Date:

Drawn By:	Date:	Approved By:	Date:	Catalog Code
T. Socha	20. Dec. 2010	T. DiVozzi	20. Dec. 2010	FZA-DEGD/3P.75GY
				Tricab, Inc. 15 Coppage Drive Worcester, MA 01603 Tel. 508-421-4680 Fax. 508-421-4681
2	28. Feb. 2011	Added P/N UK494302022.102		
1	20. Dec. 2010	Initial Release		TS
Issue	Date	Change		By

