

**TPV16/26B/055**  
Single Conductor Only (no shield)

**Conductors:** 16AWG 26/30 Bare Copper  
per ASTM B-174

**Strand Diameter:** .0010"

**Conductor Diameter:** .060" Nominal O.D. 8.0 lbs per mft

**Insulation:** Mobile Exxon Santoprene 101-80

**Thickness:** .055" Nominal


**Diameter:** .160" ± .005" ← Should be .170" +/- .005"

**Physical Properties:**

Tensile Strength: 1610 PSI  
Elongation: 540%  
Specific Gravity: .97  
Shore Hardness: 86A

RoHS Compliant

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

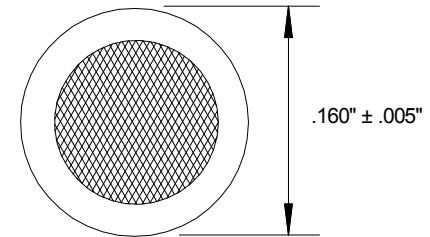

*Hueson Corporation*

*Product Specification*

Drawn By: <b>Brian Hanlon</b>	Product Description 16 AWG 26/30 Bare Copper TPV	REV <b>0</b>
Date: April 27, 2015	Drawing No. <b>TPV16/26B/055</b>	