

# COPPERFIELD PRODUCT SPECIFICATION


<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
10/26/2005	B	10227	UPDATED CU DESCRIPTION

**CF Parent Number:** **3/008-**

**Description:** 3/0 19X85/30 BC SGX per J1127 Ink Print

**DIAMETER:** 0.654

**TOLERANCE ± :** 0.015

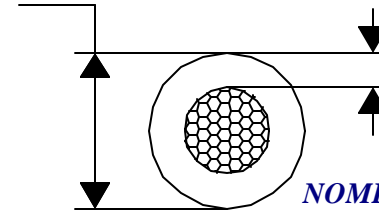

**NOMINAL WALL:** 0.078

**MINIMUM WALL:** 0.055

**Stranding:** 19X85/30 BC Unilay

**Style:** SGX per SAE J1127

**Insulation:** XLPE

**Print Legend:** 3/0 GA SAE J1127 TYPE SGX

**Voltage:** Per SAE J 1127 this product is intended for use at a nominal system voltage of 60 Volts DC or less in surface vehicle electrical systems.

**Temperature:** The Temperature Class Rating is 125C. The Temperature Class rating is defined by SAE as " a class designation based on the retention of mechanical properties after 168 hours of aging at 30C above the temperature class rating".

**Notes:**

This product complies with European Directive 2002/95/EC (RoHS)

**Customer Approval:**

**Customer Part Nbr(s):** \_\_\_\_\_

**Approved By:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Title:** \_\_\_\_\_ **Company Name:** \_\_\_\_\_

**COPPERFIELD, LLC.**

*1115 W. North Street  
Bremen, IN 46506*

*Phone: 574-546-5115*

*Fax: 574-546-5995*

*www.copperfieldllc.com*

