


## SINGLE CONDUCTOR

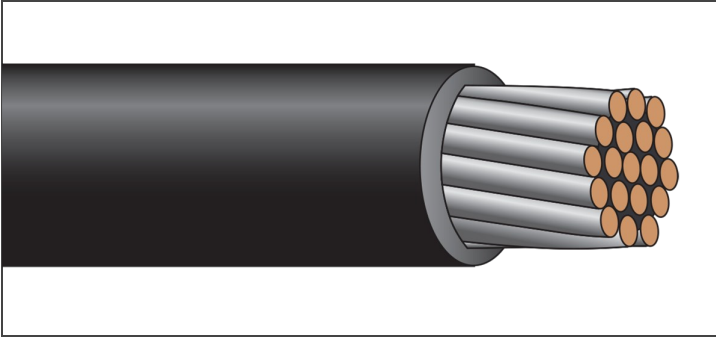

## SWITCHBOARD WIRE

### SIS or RW90

600/1,000 Volt Copper



### Description:

Single tinned copper conductor, stranded and insulated with moisture and heat resistant, chemically crosslinked polyethylene. **Available in colors.**

### Application:

Suitable for use in 105°C dry systems.

### Standards:

UL 44

C(UL)US: CSA/UL Listed (#14 AWG and larger)

ICEA S-95-658/NEMA WC-70

Federal Spec. A-A-59544

Flame Rated: UL 1581, Vertical Flame (VW1: #14 AWG and larger)

Dual Rated Type XHHW-2 (#14 AWG and larger),

UL 66 Fixture Wire (#16 AWG)

Temperature Rated at 90°C Wet/Dry, Cold Temperature Rated at -40°C

Sunlight Resistant (#16 AWG and #6 AWG), Gasoline and Oil Resistant II

RoHS Compliant

Flex-Strand Catalog Number	Size (AWG)	Stranding Flex-Strand (no.)	Stranding Class B (no.)	Insulation Thickness (mils)	Nominal Diameter Overall (in.)	Approx. Net Weight (lb./1000')	Ampacity** (30°C ambient) 90°C Wet/Dry
SIST16	16*	26	7	30	0.121	12	8
SIST14VW	14	41	7	30	0.139	19	25***
SIST12VW	12	65	7	30	0.158	27	30***
SIST10VW	10	104	7	30	0.182	40	40***
SIST8VW	8	133	7	45	0.238	67	55
SIST6VW	6	133	7	45	0.274	100	75

\*#16 AWG is FFH-2. NOTE: Copper Conductor available Non-Tinned.

\*\*Per NEC Table 310.15 (B)(17).

\*\*\*The overcurrent protection for items marked "\*\*\*\*" shall not exceed 15 amps for #14 AWG, 20 amps for #12 AWG, and 30 amps for #10 AWG per NEC 310-16 footnote.

NOTE: The data shown is approximate and subject to standard industry tolerances.