

CAT. No.
1601312

UNIVERSAL CORDAGE, SJTOW 11/3 AWG, 300 VOLT & H05VV-F 4.0mm², 250/440 VOLT, 105°C RATED, BROWN, BLUE, GREEN/YELLOW INTERNAL CONDUCTOR COLORS. BLACK OUTER JACKET. SUPPLIED IN 400FT COILS.


APPROVALS	C(UL)US <input checked="" type="checkbox"/>	VDE <input checked="" type="checkbox"/>	HAR <input checked="" type="checkbox"/>	SAA <input checked="" type="checkbox"/>	FI <input checked="" type="checkbox"/>	D <input checked="" type="checkbox"/>	N <input checked="" type="checkbox"/>	S <input checked="" type="checkbox"/>	+S <input checked="" type="checkbox"/>	IEMMEQU <input checked="" type="checkbox"/>	
CERTIFICATIONS	REACH <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>	CE <input checked="" type="checkbox"/>								

NORTH AMERICAN TECHNICAL DATA

SJTOW JACKET
11/3 AWG
300 VOLT
105°C RATED
VW-1

EUROPEAN/INTERNATIONAL TECHNICAL DATA

H05VV-F JACKET
4.0mm²
250/440 VOLT
105°C RATED
V-75

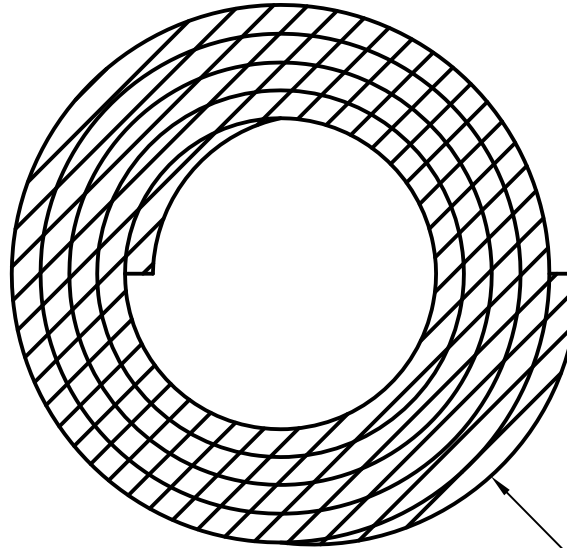


RELATED ITEMS

CATALOG No	DESCRIPTION
1601318	17/3AWG, 1.0mm ²
1601316	15/3AWG, 1.5mm ²
1601314	14/3AWG, 1.5mm ²
1601313	13/3AWG, 2.5mm ²
1601312	11/3AWG, 4.0mm ²

400 FT COIL,
OUTSIDE DIAMETER OF
ENTIRE COIL 495mm±30mm

CONDUCTOR TECHNICAL DATA

INDIVIDUAL CONDUCTOR	NUMBER OF STRANDS	83
	CROSS SECTION AREA	4.17mm ²
INDIVIDUAL CONDUCTOR INSULATION	MINIMUM AVERAGE THICKNESS	0.80mm
	INSULATION DIAMETER	4.25mm+0.2mm/-0mm
OVERALL OUTER JACKET	MINIMUM AVERAGE THICKNESS	1.2mm
	OVERALL DIAMETER	11.7mm+0.3mm/-0mm

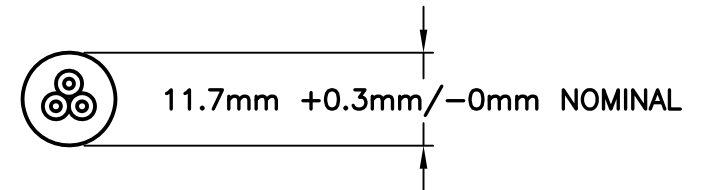

11/3 AWG, (4.0mm²) CONDUCTORS



RATED 300 VOLT NORTH AMERICAN & 250/440 VOLT EURO/INTL