

DESCRIPTION: 14/3 SJT 105C 300V

CUSTOMER: IEWC

CUSTOMER P/N: SJT1403-9/105C\_A

CORE DIMENSIONS FOR INTERNAL USE ONLY

NWI P/N: FSJT143-137

DRAWN BY: DP LANGER

UNITS: IN

SCALE: 8:1

ITEM

SPECIFICATIONS



DWG NO: 52591-1

DATE: 9/18/2014

REV: A

- | ITEM | SPECIFICATIONS  |
|------|---|
| A.   | 14 GAUGE 41x30BC BUNCHED  |
| B.   | 30 MIL PVC INSULATION 105C 300V<br>27 MIL MIN. PVC INSULATION<br>O.D. .135 ± .002" STANDARD SJT CONDUCTOR   |
| C.   | POLY FILLER   |
| D.   | TISSUE PAPER SEPARATOR  |
| E.   | 30 MIL PRESSURED PVC JACKET 105C 300V<br>24 MIL MIN. PVC JACKET WHITE JACKET<br>UL LISTED AND CSA CERTIFIED |

ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU

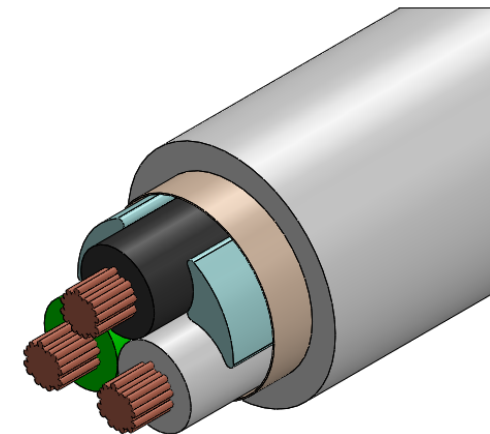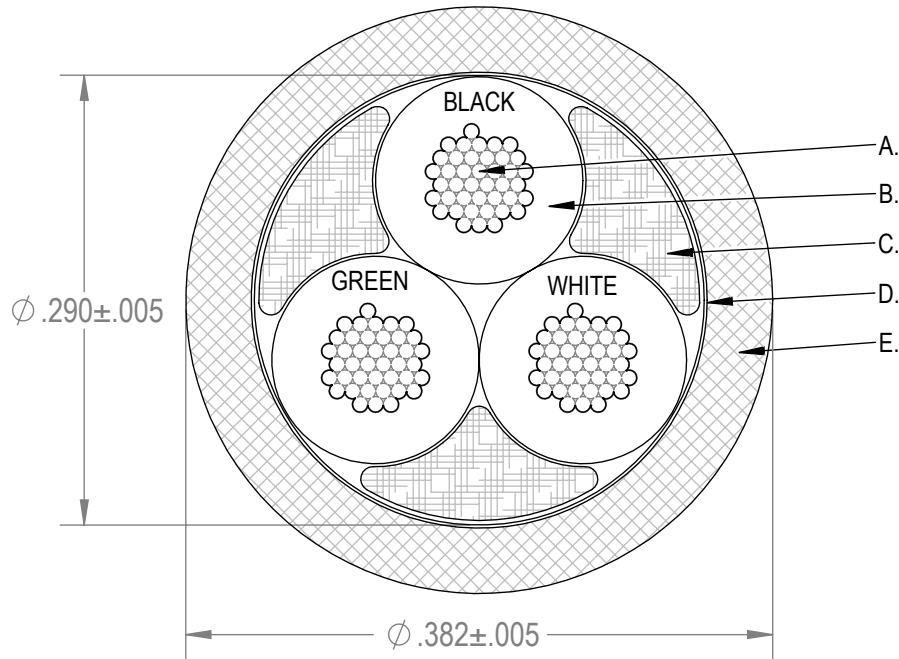

ISOMETRIC VIEW FOR REFERENCE ONLY

LEGEND SPECIFICATIONS INDENT PRINT  
NORTHWIRE INC. (UL) 3/C 14 AWG (2.08mm<sup>2</sup>) SJT 105C 300V FT2 CSA



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 14/3 SJT 105C 300V

UNITS: IN

SCALE: 60:1

ELECTRICAL REQUIREMENTS

CUSTOMER: IEWC

NWI P/N: FSJT143-137

DWG NO: 52591-1

NONE SPECIFIED

CUSTOMER P/N: SJT1403-9/105C\_A

DRAWN BY: DP LANGER

DATE: 9/18/2014

REV: A



MECHANICAL REQUIREMENTS

NONE SPECIFIED

INITIAL RELEASE	A	9/18/14	DPL
REVISION RECORD	REV.	REV DATE	APR
REVISIONS			