




DESC: 18/3 SJT 60C 300V	DWG NO: 45675-1
SCALE: 20X	DATE: 10/8/13
DR. BY: DPL	NWI P/N: SEE BELOW
CUSTOMER: IEWC	CUSTOMER P/N: SJT1803S-0/60C-NW

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

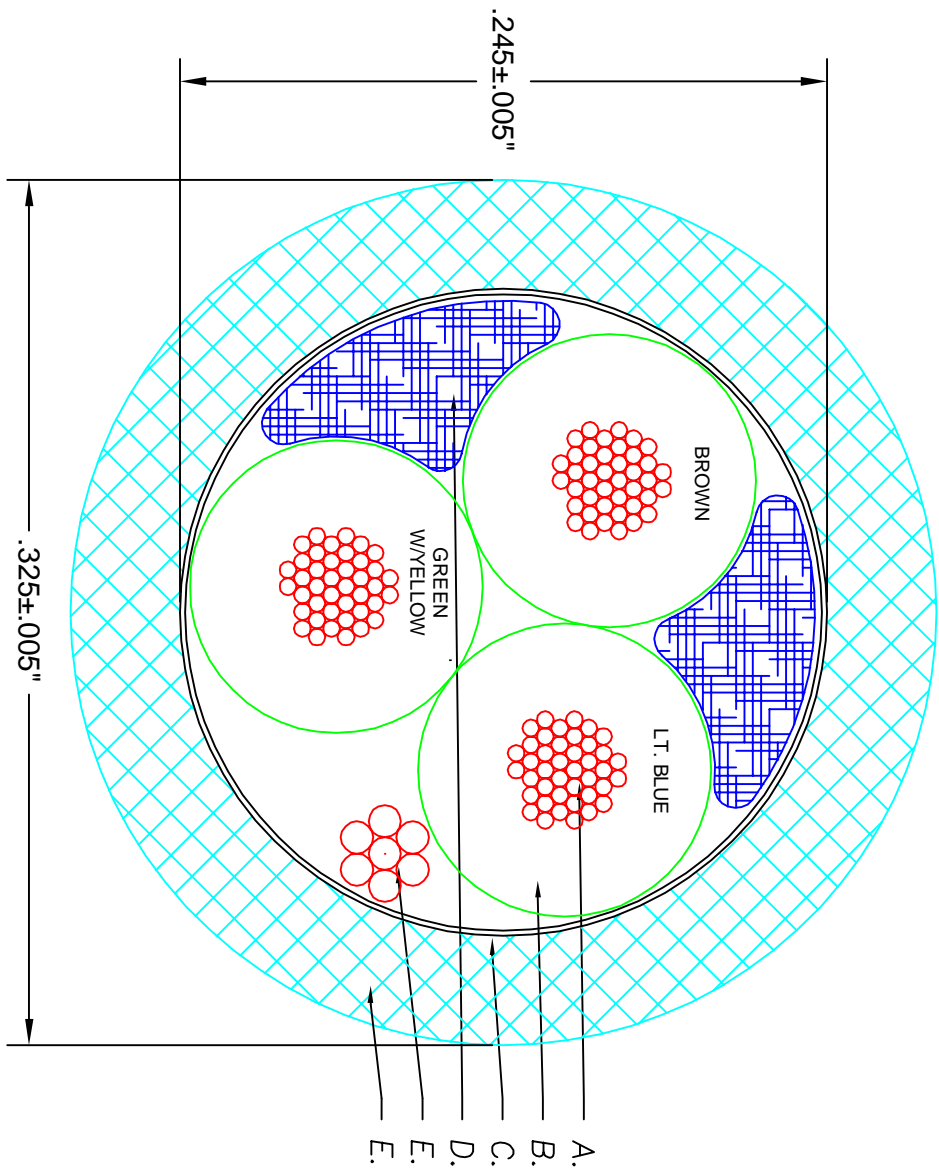

ITEM	SPECS.
A.	18 GAUGE 41X34BC BUNCHED
B.	30 MIL PVC INSULATION 60C 300V
C.	27 MIL MIN. PVC INSULATION STANDARD SJT COND O.D. .110±.002" ALUMINUM FOIL SHIELD: FOIL IN 25% MIN. OVERLAP 100% COVERAGE
D.	POLY FILLER
E.	20 GAUGE 7x.0121TC DRAIN
F.	30 MIL PRESSURED PVC JACKET 60C 300V 24 MIL MIN. PVC JACKET BLACK JACKET UL APPROVED AND CSA CERTIFIED

OSCEOLA PART NO: FSJT183-266  
 SANTA TERESA P/N: FSJT183-266N

**ELECTRICAL REQUIREMENTS:**  
 NONE SPECIFIED

**MECHANICAL REQUIREMENTS:**  
 NONE SPECIFIED  
 CORE DIMENSIONS FOR INTERNAL USE ONLY

INITIAL RELEASE	REVISION RECORD
A	10/8/13 DPL
REV	REV DATE APR 1 APR 2 QA R