




DESC: 18/5 SUT 105C 300V	DWG NO: 45752-1
SCALE: 15x	DATE: 8/16/13
DR. BY: DPL	NWI P/N: T.B.D.
CUSTOMER: IEWC	CUSTOMER P/N: T.B.D.

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

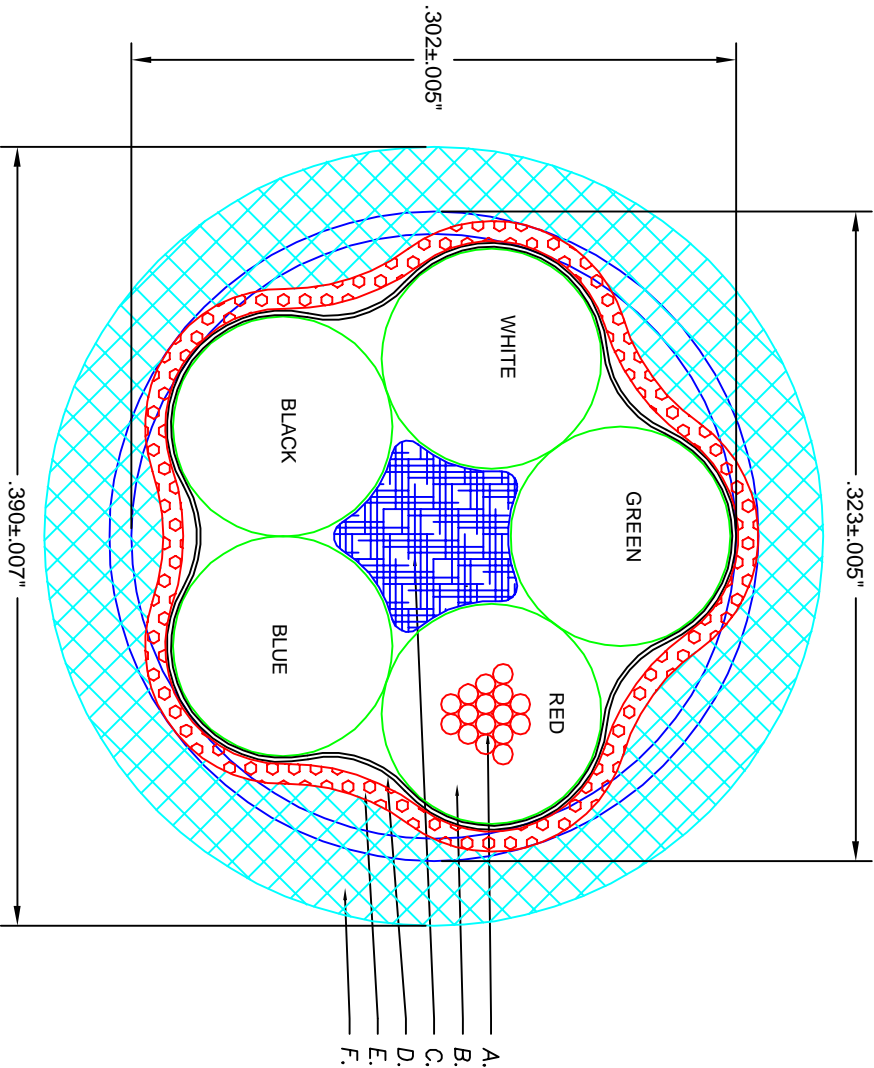

- A.
- B.
- C.
- D.
- E.
- F.

ITEM	SPECS.
A.	18 GAUGE 16x30BC BUNCHED
B.	30 MIL PVC INSULATION 105C 300V
C.	27 MIL MIN. PVC INSULATION O.D. .110±.002"
D.	POLY FILLER
E.	OPAQUE MYLAR WRAP
F.	20% MIN. OVERLAP 100% COVERAGE
	85% MIN. TC BRAID SHIELD
	36 GAUGE SINGLE ENDS
	30 MIL PRESSURED PVC JACKET 105C 300V
	24 MIL MIN. PVC JACKET CLEAR JACKET
	UL APPROVED AND CSA CERTIFIED
	JACKET WILL MIGRATE INTO THE BRAID
	JACKET REMOVAL WILL BE A LITTLE DIFFICULT
	DUE TO THIS

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

INITIAL RELEASE	REVISION RECORD
1	8/16/13 DPL
REV	REV DATE APR 1 APR 2
	QA R