


# SKINDICHT® SVFK

## Polystyrene Strain Relief Connectors for Flat & Festoon Cable with PG Thread

The SKINDICHT® SVFK is a compact strain relief connector for flat cable made of polystyrene. The special neoprene bushing provides a flexible seal over a wide range of cable widths. Ideal for use with ÖLFLEX® FLAT, ÖLFLEX® LIFT F, or ÖLFLEX® CRANE F.

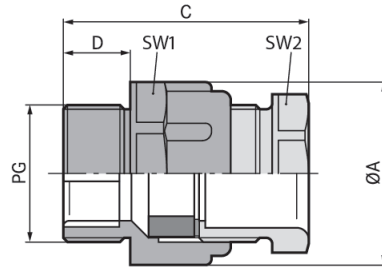

Technical Data	
<b>Material:</b>	- Body: Polystyrene - Seal: Neoprene bushing
<b>Temperature Range:</b>	-20°C to +60°C
<b>Protection:</b>	IP54
<b>Color:</b>	Light gray (RAL 7035)

### Approvals




Part Number	Thread Type & Size	Minimum Flat Cable Width		Maximum Flat Cable Width		Minimum Cable Thickness		Maximum Cable Thickness		C Overall Length (inches)	D Thread Length (inches)	SW Wrenching Flats (inches)		Standard Pack Size
		(inches)	(mm)	(inches)	(mm)	(inches)	(mm)	(inches)	(mm)			SW1	SW2	
52005470	PG 16	—	—	0.591	15.0	—	—	0.197	5.0	1.56	0.39	1.064	0.906	25
52005680	PG 21	0.394	10.0	0.808	20.5	0.118	3.0	0.315	8.0	1.69	0.43	1.261	1.182	25
52005690	PG 29	0.591	15.0	1.064	27.0	0.158	4.0	0.453	11.5	1.77	0.43	1.655	1.615	25
52005700	PG 36	0.985	25.0	1.340	34.0	0.158	4.0	0.453	11.5	2.01	0.51	2.088	1.970	10
52005710	PG 42	1.182	30.0	1.576	40.0	0.197	5.0	0.473	12.0	2.13	0.51	2.364	2.167	5
52005720	PG 48	1.379	35.0	1.773	45.0	0.197	5.0	0.473	12.0	2.17	0.59	2.561	2.364	5

# SKINDICHT® SVF

## Brass Strain Relief Connectors for Flat & Festoon Cable with PG Thread

The SKINDICHT® SVF is a compact strain relief connector made of nickel-plated brass for flat cable. The special neoprene bushing provides a flexible seal over a wide range of cable widths. Ideal for use with ÖLFLEX® FLAT, ÖLFLEX® LIFT F, or ÖLFLEX® CRANE F.

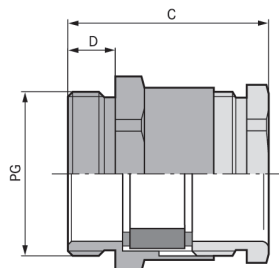

Technical Data	
<b>Material:</b>	- Body: Nickel-plated brass - Seal: Neoprene bushing
<b>Temperature Range:</b>	-20°C to +100°C
<b>Protection:</b>	IP54
<b>Locknuts:</b>	Add SM locknuts, page 545

### Approvals



Part Number	Thread Type & Size	Minimum Flat Cable Width		Maximum Flat Cable Width		Minimum Cable Thickness		Maximum Cable Thickness		C Overall Length (inches)	D Thread Length (inches)	SW Wrenching Flats (inches)		Standard Pack Size
		(inches)	(mm)	(inches)	(mm)	(inches)	(mm)	(inches)	(mm)			SW1	SW2	
52005480	PG 16	—	—	0.630	16.0	—	—	0.197	5.0	1.08	0.26	0.946	0.867	25
52005490	PG 21	0.355	9.0	0.827	21.0	0.118	3.0	0.315	8.0	1.18	0.28	1.182	1.103	25
52005500	PG 29	0.552	14.0	1.182	30.0	0.158	4.0	0.453	11.5	1.24	0.32	1.576	1.458	10
52005510	PG 36	0.946	24.0	1.576	40.0	0.158	4.0	0.453	11.5	1.42	0.35	1.970	1.852	10
52005520	PG 42	1.143	29.0	1.773	45.0	0.197	5.0	0.473	12.0	1.58	0.39	2.246	2.128	5
52005530	PG 48	1.340	34.0	1.970	50.0	0.197	5.0	0.473	12.0	1.64	0.39	2.522	2.364	5

Photographs are not to scale and are not true representations of the products in question. For current information go to our website. If not otherwise specified, all values relating to the product are nominal values.